

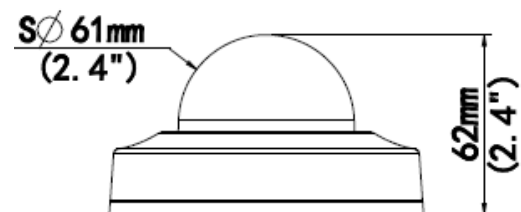
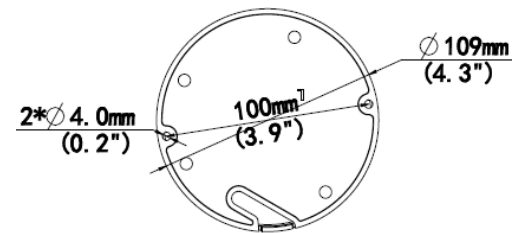
Overview

- 4 Megapixel IR
- True WDR 120dB
- 2.8mm Fixed Lens
- H.265, H.264, MJPEG
- Support 9:16 Corridor Mode
- Indoor Camera
- Built-in Mic
- NDAA Compliant
- ONVIF Profile G, S, T






Technical Specifications

Device	
Image Sensor:	1/2.7", 4.0 Megapixel, Progressive Scan CMOS
Min Illumination:	Color: 0.003Lux (F1.6, AGC ON) 0Lux with IR
Shutter Time:	Auto/Manual, 1 ~ 1/100000s
Lens:	2.8mm @ F1.6
WDR:	120 dB
S/N:	>52dB
Angle of View:	H: 101.1°, V: 55.3°, 111.1°
Angle Adjustment:	Pan: 0° ~ 348° Tilt: -66° ~ 66° Rotate: 0° ~ 346°
Day & Night:	IR-Cut Filter with Auto Switch (ICR)
IR Range:	Up to 30m (98ft) IR range
Compression Standard	
Video Compression:	H.265, H.264, MJPEG
Video Bit Rate:	128 Kbps~16 Mbps
Triple-Stream:	Yes
Analytics:	Crossline & Intrusion, Enter area, Leave area, Motion Detection, Tampering Alarm, Audio Detection
Image	
Max. Image Resolution:	2688 x 1520
Frame Rate:	30fps (2688 x 1520)
ROI Codec:	Up to 8 areas
Image Setting:	White Balance, Digital Noise Reduction, Smart IR, Flip, HLC, BLC, Defog



Technical Specifications

Network					
Alarm Channels:	1 Channel In 1 Channel Out				
Protocols:	IPv4, IPv6, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL, QoS				
Interface					
Communication Interface:	10M/100M Base-TX Ethernet				
Edge Storage:	Micro SD, up to 256GB				
Audio Compression:	G.711U, G.711A				
Audio I/O:	Input: Impedance 35kΩ; Amplitude 2V [p-p] Output: Impedance 600Ω; Amplitude 2V [p-p]				
DORI					
DORI Distance	Lens (mm)	Detect (m)	Observe (m)	Recognize (m)	Identify (m)
	2.8	63.0	25.2	12.6	6.3
General					
Safety	CE: EN 62368-1 UL: UL 62368-1				
EMC	FCC: FCC Part 15 CE-EMC: EN 55032/ EN 55035/ EN IEC 61000-3-2/ EN 61000-3-3				
Operating Conditions:	Temperature: -30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (Non-Condensing)				
Power Consumption:	Max 4.5W				
Power Supply:	DC 12V±25%, PoE (IEEE 802.3af)				
Weather Proof Rating:	-				
Vandal Resistant:	-				
Dimensions:	Φ109 x 62mm (Ø4.3" x 2.4")				
Weight:	0.22kg (0.49lb)				
Software:	No license required for use with Video Insight Software				
Optional Accessories					
	M-JB-MINI	M-WM-JB-MINI	M-PM		
					
	M-Pendant-Ex	M-Pendant			
	