

# How to Attach the Safety Wire


When mounting the camera to a wall or ceiling, be sure to follow the steps below to attach the safety wire. This leaflet explains the ceiling mounting procedure using a mount bracket (locally procured).

## [1] Attach the safety wire (accessory) using the safety wire lug (accessory) and the safety wire lug fixing screw (accessory).

(Recommended tightening torque:  
1.18 N·m {0.87 lbf·ft})

### IMPORTANT:

- To fix the camera to a ceiling or similar location using the camera tripod mounting hole on the top, attach the safety wire lug to the bottom of the camera.
- To fix the camera to a wall or similar location using the camera tripod mounting hole on the bottom, attach the safety wire lug to the top of the camera.

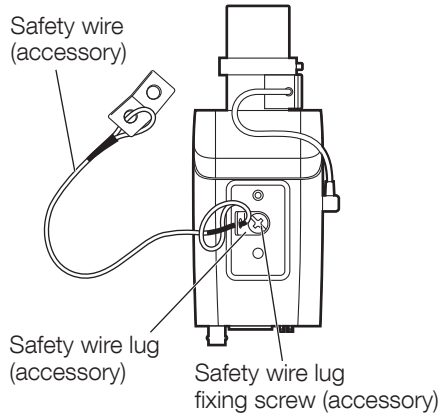


## [2] Follow “Step 3 Mount the camera” in the Device Installation section of the Installation Guide to fix a mount bracket (locally procured) to the installation surface, and attach the camera to the mount bracket.

## [3] Fix the safety wire to the installation surface using the safety wire lug (accessory) and the fixing screw (M8: locally procured).

### IMPORTANT:

Fixing screw (M8: locally procured)  
Minimum pull-out force: 724 N {163 lbf}

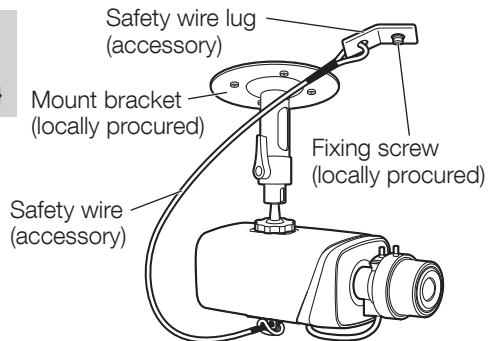

Proceed to “Step 4 Alarm Input and Output connection, if necessary.”.