

## WJ-NU101KG

**Network Video Recorders** 

## New higher secure level and easy installation NVRs with a build-in PoE+ switch



- 4ch NVR with a built-in PoE+ switch
- Support up to 20 TB HDD
- NDAA compliant with intel® CPU
- FIPS 140-2 level 3
- Remote Monitoring

Learn More











# **SPECIFICATIONS**

| Supported Camera                                     |  |
|--|--|
| Compatible Vendor                                    | i-PRO series Network cameras,<br>ONVIF NVT conformant camera and encoder   |
| Supported Image Format                               | H.265(HEVC), H.264, JPEG   |
| Supported Image Resolution (Depending on the camera) | •Aspect ratio [4 : 3] 3072x2304, 2560x1920, 2048x1536, 1600x1200, 1280x960, 800x600, 640x480 •Aspect ratio [16 : 9] 3840x2160, 3328x1872, 3072x1728, 2688x1520, 2560x1440, 1920x1080, 1280x720, 640x360 •Aspect ratio [1 : 1] 2992x2992, 2816x2816, 2192x2192, 2048x2048, 1440x1440, 1280x1280, 1200x1200 •Aspect ratio [9 : 16] 2160x3840, 1872x3328, 1728x3072, 1520x2688, 1440x2560, 1080x1920, 720x1280, 360x640 |
| Supported Audio Format                               | AAC-LC, G.711 for ONVIF  |
| Maximum Number of Cameras                            | MAX. 4   |

| Recording                |  |
|--------------------------|--|
| Recording Mode           | Event, Schedule, Emergency, Pre-event  |
| Pre-alarm Recording      | Up to 15 seconds *When the delivery speed from the network camera is less than 4 Mbps. |
| Sub-stream Recording     | -  |
| Scheduled Recording Mode | 4 programs, 6 time zones/day, Independent setup for each day of the week               |
| Frame Rate/Camera        | Up to 60 fps (Depending on the camera)   |

| Main Unit Functions |  |  |
|---------------------|--|--|
| Camera Control      | Pan/Tilt, Zoom, Focus, Brightness, Preset position call and program (up to 256), Auto mode, Click centering, Wheel zoom, Zoom reset, Auto Back Focus, Aux, Wiper (for WV-SUD638)   |  |
| Multiscreen Mode    | <ul> <li>[Main monitor]</li> <li>Control screen 4 split screen display</li> <li>Wide view screen 2 / 3 / 4 split screen display,1 screen sequence</li> <li>[Sub monitor]</li> <li>1 screen sequence, 4 split screen display</li> </ul> |  |
| Playback Control    | PLAY, Rev PLAY, Pause, Stop, FF, FR, Prev Record, Next Record, Prev Image, Next Image, Go to Date, Go to Last (30 s), Time-saving playback   |  |
| Search Mode         | Search criteria : Time date, Playback by designating a timeline, VMD, Thumbnail  |  |
| Сору                | File Format: Original Format / MP4 Recorded data of selected cameras and time date range can be copied to USB storage.   |  |
| Camera Title        | Up to 16 Characters  |  |
| Clock Display       | Time: 12H/24H, Date: 5 formats   |  |
| Digital Zoom        | Live / Play: 1.25x 1.5x 1.75x, 2x, 2.5x, 3x, 3.5x 4x, 5x, 6x, 7x, 8x (only for 1-screen or 4-screen)   |  |
| System Log          | Operator access (500), Network error (100), Error (1,000), Event (1000), Operation (500)   |  |
| System Setup        | Setup page in English, French, Italian, Spanish, German, Portuguese, Thai, Vietnamese, Simplified Chinese, Traditional Chinese, Japanese   |  |
| 360 Camera Dewarp   | Only 1ch display mode.   |  |

| re-encoding              | 2Client  |
|--------------------------|--|
| SD Memory Data Download  | Images recorded in the SD card in the i-PRO series cameras can be transferred to the recorder automatically. (H.265/H.264)   |
| Browser GUI              |  |
| Camera Control           | Pan/Tilt, Zoom, Focus, Brightness, Preset position call and program (up to 256), Auto mode, Zoom reset, Aux Wiper (for WV-SUD638)  |
| Playback Control         | PLAY, Rev PLAY, Pause, Stop, FF, FR, Prev Record, Next Record, Prev Image, Next Image, Go to Date, Go to Last (30 s)   |
| Search Mode              | Search criteria : Time date, Event type, Camera number   |
| Display Mode             | 1 screen   |
| Image Download           | File Format: Original Format Recorded data of selected camera and time range can be downloaded to a PC. Viewer software can be downloaded separately.  |
| Сору                     | File Format: Original Format / MP4 Recorded data of selected cameras and time date range can be copied to USB storage.   |
| Camera Title             | Up to 16 characters  |
| Clock Display            | On the browser. Time: 12H/24H, Date: 5 formats   |
| Alarm Control            | Reset  |
| Digital Zoom             | -  |
| System Log               | Operator access (500), Network error (100), Error (1,000), Event (1000), Operation (500)   |
| GUI Language             | English, French, Italian, Spanish, German, Portuguese, Thai, Vietnamese, Simplified Chinese, Traditional Chinese, Japanese   |
| Required PC              | CPU: Intel® Core™ i7-860 or faster , RAM : 4 GB or more,<br>VRAM: 128 MB or more (Min. 64 MB), Microsoft® DirectX® 9.0c or later   |
| Web Browser              | Microsoft Edge*, Google Chrome, Mozilla Firefox *Not compatible with Internet Explorer mode  |
| Alarm/Event              |  |
| Alarm Source             | 4x Terminal inputs, 4x Camera alarms (TCP alarm notification), 128x Command alarms   |
| Event Mode               | Off / On   |
| Alarm Action             | Alarm recording, E-mail notification, Alarm message, Camera positioning, Terminal output, TCP/HTTP alarm notification output, Buzzer, Indicator  |
| Alarm Control            | Reset  |
| Event log                | 1000   |
| Input/Output             |  |
| Monitor (HDMI) Connector | [Main monitor] HDMI 4K UHD(3840x2160p)/30Hz, 4K UHD(3840x2160p)/25Hz, 1920x1080p/60Hz, 1920x1080p/50Hz<br>[Sub monitor] HDMI 1920x1080p/60Hz, 1920x1080p/50Hz  |
| Alarm/Control Terminal   | [Alarm] Alarm input 4, Alarm output 1<br>[Control] +5 V output, Emergency recording input, General purpose input/output<br>[Error / Warning] HDD error / Recording error output, Camera error output |
| Mouse Connection Port    | 1 (USB 2.0)  |
| Network Port (PC)        | 1x 10BASE-T / 100BASE-TX / 1000BASE-T (RJ45)   |
| Network Port (Camera)    | 4x 10BASE-T / 100BASE-TX(RJ45), (RJ45, PoE+), PoE Budget (4 port Total : Max 50 W, Each port Max : 30 W)   |
| USB Storage              | USB 3.0 / USB 2.0 memory, USB 3.0 / USB 2.0 connected HDD (except bus powered device)  |
|                          |  |

| Network                                      |  |
|--|--|
| Network Interface                            | 10BASE-T / 100BASE-TX / 1000BASE-T (RJ45)  |
| Maximum Recording Rate                       | 48 Mbps  |
| Maximum Bandwidth                            | Total 96 Mbps  |
| Supported Protocol                           | IPv4: TCP/IP, UDP/IP, HTTP, HTTPS, SMTP, DNS, NTP, SNMP, RTP, RTSP, ICMP, ARP IPv6: ICMPv6   |
| E-mail                                       | Upon Alarm or Warning  |
| No. of Simultaneous Users                    | 16 or less   |
| User Registration                            | Up to 32 users   |
| User Level                                   | 3 Levels<br>(Programmable)   |
| Partitioning                                 | User level - Camera<br>(View & Control, No Access)   |
| Security Method                              | User authentication (ID and Password), Host authentication, Alteration detection, SSL/TLS  |
| Other Functions                              |  |
| Time Synchronization                         | NTP (Server/Client)  |
| Summer Time                                  | User definable (using menu setup)  |
| Remote Monitoring (Cloud service for P2P)    | 40 cameras or less<br>Allows the PC full access to the multiple NU series NVRs.  |
| HDD  |  |
| Туре   | 3.5 inch   |
| Maximum Capacity                             | 20 TB  |
| RAID   | -  |
| Viewer Software                              |  |
| Playback Control                             | PLAY, Rev PLAY, Pause, FF, FR, Prev Record, Next Record, Prev Image, Next Image  |
| Additional Functions                         | [NX Viewer] Alteration detection, Save as JPEG, Two times zoom, Print, Copy, Aspect ratio switching, fish eye correction, corridor display                       |
| Supported OS, Language                       | Language of the software will be English or Japanese   |
| - 15 10 11                                   |  |
| General Specifications Safety / EMC Standard | CE/UKCA<br>(EN55032/EN55035)   |
| Power Source                                 | DC 54 V 1.67 A (included AC power adapter)   |
| Power Consumption                            | 90 W<br>(DC 54 V 1.67 A)   |
| Ambient Operating Temperature                | Main body:  0 °C to +45 °C (32 °F to 113 °F)  Mouse (provided):  +5 °C to +40 °C (41 °F to 104 °F)  AC power adapter (provided):  0 °Cto+40 °C (32 °F to 104 °F) |
| Ambient Operating Humidity                   | 5 % to 90 %<br>(without condensation)  |
| Maximum Operating Altitude                   | 2,000 m (6,562 feet) above sea level   |

| Dimensions     | 340 mm(W) x 44 mm(H) x 230 mm(D) {13-3/8 inches (W) x 1-23/32 inches (H) x 9-1/16 inches (D)} |
|----------------|---|
| Mass (approx.) | App 2.1 kg {4.6 lbs}  |

### **NOTES**

#### Important

- Safety Precautions: Carefully read the Basic Information, Installation Guide and Operating Instructions before using this product.
- i-PRO Co., Ltd. cannot be held responsible for the performance of the network and/or other manufacturers' products used on the network.
- Masses and dimensions are approximate.
- Specifications are subject to change without notice.

Trademarks and registered trademarks

- iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. Android is a trademark of Google LLC.
- ONVIF is a trademark of ONVIF, Inc.
- All other trademarks identified herein are the property of their respective owners ©i-PRO Co., Ltd All rights reserved / November 2022



## **OPTIONAL ACCESSORIES**

Select a compatible accessory

Accessory Selector (i-pro.com)









WV-QRM101 Mount Bracket



WV-QRM001 Mount Bracket

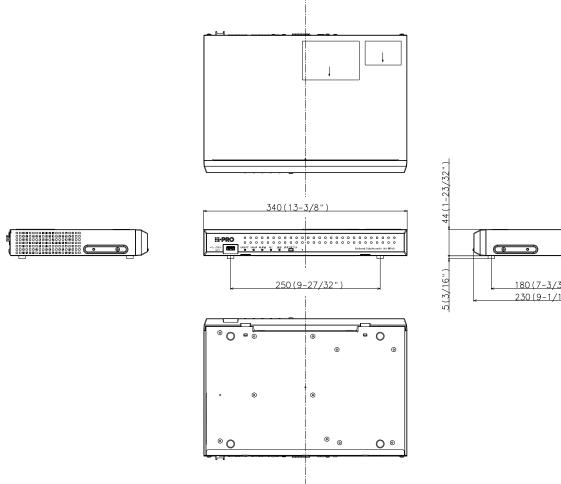

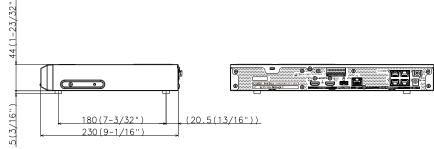

WJ-NU101KP WJ-NU101KG

Desktop installation