



Overview

- 4 Megapixel IR
- True WDR 120dB
- 2.8mm Fixed Lens
- H.265, H.264, MJPEG
- Support 9:16 Corridor Mode
- Indoor Camera
- Built-in Mic
- NDAA Compliant
- ONVIF Profile G, S, T





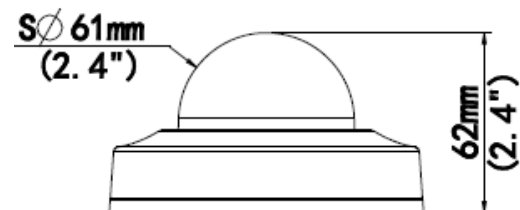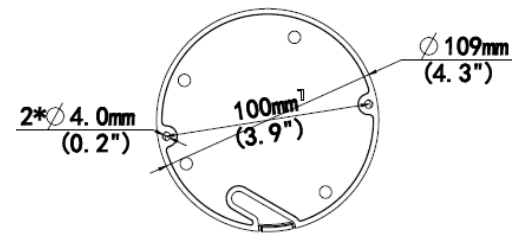


Technical Specifications

| Device | |
|------------------------|---|
| Image Sensor: | 1/2.7", 4.0 Megapixel, Progressive Scan CMOS |
| Min Illumination: | Color: 0.003Lux (F1.6, AGC ON) 0Lux with IR |
| Shutter Time: | Auto/Manual, 1 ~ 1/100000s |
| Lens: | 2.8mm @ F1.6 |
| WDR: | 120 dB |
| S/N: | >52dB |
| Angle of View: | H: 101.1°, V: 55.3°, 111.1° |
| Angle Adjustment: | Pan: 0° ~ 348° Tilt: -66° ~ 66° Rotate: 0° ~ 346° |
| 3-Axis Adjustment: | Yes |
| Day & Night: | IR-Cut Filter with Auto Switch (ICR) |
| IR Range: | Up to 30m (98ft) IR range |
| Compression Standard | |
| Video Compression: | H.265, H.264, MJPEG |
| Video Bit Rate: | 128 Kbps~16 Mbps |
| Triple-Stream: | Yes |
| Analytics: | Crossline & Intrusion, Enter area, Leave area, Motion Detection, Tampering Alarm, Audio Detection |
| Image | |
| Max. Image Resolution: | 2688 x 1520 |
| Frame Rate: | 30fps (2688 x 1520) |
| ROI Codec: | Up to 8 areas |
| Image Setting: | White Balance, Digital Noise Reduction, Smart IR, Flip, HLC, BLC |



Technical Specifications

| Network | | | | | |
|--------------------------|--|---|--|---------------|--------------|
| Alarm Channels: | 1 Channel In 1 Channel Out | | | | |
| Protocols: | IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL, QoS | | | | |
| Interface | | | | | |
| Communication Interface: | 10M/100M Base-TX Ethernet | | | | |
| Edge Storage: | Micro SD, up to 256GB | | | | |
| Audio Compression: | G.711U, G.711A | | | | |
| Audio I/O: | Input: Impedance 35kΩ; Amplitude 2V [p-p] Output: Impedance 600Ω; Amplitude 2V [p-p] | | | | |
| DORI | | | | | |
| DORI Distance | Lens (mm) | Detect (m) | Observe (m) | Recognize (m) | Identify (m) |
| | 2.8 | 63.0 | 25.2 | 12.6 | 6.3 |
| General | | | | | |
| Safety | CE: EN 62368-1 UL: UL 62368-1 | | | | |
| EMC | FCC: FCC Part 15 CE-EMC: EN 55032/ EN 55035/ EN IEC 61000-3-2/ EN 61000-3-3 | | | | |
| Operating Conditions: | Temperature: -30°C ~ 55°C (-22°F ~ 131°F), Humidity: ≤95% RH (Non-Condensing) | | | | |
| Power Consumption: | Max 4.5W | | | | |
| Power Supply: | DC 12V±25%, PoE (IEEE 802.3af) | | | | |
| Weather Proof Rating: | - | | | | |
| Vandal Resistant: | - | | | | |
| Dimensions: | Φ109 x 62mm (Ø4.3" x 2.4") | | | | |
| Weight: | 0.22kg (0.49lb) | | | | |
| Software: | No license required for use with Video Insight Software | | | | |
| Optional Accessories | | | | | |
| | M-JB-MINI | M-WM-JB-MINI | M-PM | | |
| |  |  |  | | |
| | M-Pendant-Ex | M-Pendant | | | |
| |  |  | | | |