

**Preliminary**

**New higher secure level and easy installation NVRs with a build-in PoE+ switch**

## Network Disk Recorder

WJ-NU201KG Network video recorders, NVRs with a build-in PoE+ switch for 8ch.

Not only you don't need prepare PoE+ switch separately, but with new stylish slim design, you can install new NVRs anywhere easily like wall hanging, vertical installation\*1.

Additionally, you can maintain NVRs easily with screw-less structure for HDD kitting.

New NVRs are NDAA compliant with intel CPU, and they offer higher secure level operation with FIPS 140-2 level 3 Certified Secure Element and GlobalSign® certificate.

### i-PRO New NVR with a build-in PoE+ switch

- NVR is NDAA compliant with intel® CPU
- WJ-NU201KG can support up to 20 TB HDD
- ECO-writing: Acceleration of data access (reading/writing) by original file system
- i-PRO will release 8ch NVR with a build-in PoE+ switch for easy installation.

### Easy installation

- With new stylish slim design, new NVRs can be installed in various way - like wall hanging, vertical installation.\*1
- Screw-less structure for HDD kitting.

### High Security

- FIPS 140-2 level 3 certified secure element is embedded
- GlobalSign® certificates pre-installed
- Equipped Kensington Security Slot

### Connectivity

- With RTSP protocol, new NVRs can be connected with wide range of camera brands.
- With improved ONVIF connection, new NVRs have connectivity with almost all of major brands.\*2

\*1 This can be applied to WJ-NU101,201, and 300.

\*2 "Connectivity" means JPEG,H.264,H.265 connect support. Depends on camera brand, model number, firmware, those NVRs may no be able to connect.



# Specifications

<b>Supported Camera</b>	Compatible vendor	i-PRO series Network cameras, ONVIF NVT conformant camera and encoder	
	Supported Image Format	H.265(HEVC), H.264, JPEG	
	Supported Image Resolution (Depending on the camera)	<p><b>•Aspect ratio [4 : 3]</b> 3072x2304, 2560x1920, 2048x1536, 1600x1200, 1280x960, 800x600, 640x480</p> <p><b>•Aspect ratio [16 : 9]</b> 3840x2160, 3328x1872, 3072x1728, 2688x1520, 2560x1440, 1920x1080, 1280x720, 640x360</p> <p><b>•Aspect ratio [1 : 1]</b> 2992x2992, 2816x2816, 2192x2192, 2048x2048, 1440x1440, 1280x1280, 1200x1200</p> <p><b>•Aspect ratio [9 : 16]</b> 2160x3840, 1872x3328, 1728x3072, 1520x2688, 1440x2560, 1080x1920, 720x1280, 360x640</p>	
Supported Audio Format	AAC-LC, G.711 for ONVIF		
Maximum Number of Cameras	MAX. 8		
<b>Recording</b>	Recording Mode	Event, Schedule, Emergency, Pre-event	
	Pre-alarm Recording	Up to 15 seconds *When the delivery speed from the network camera is less than 4 Mbps.	
	Sub-stream Recording	-	
	Scheduled Recording Mode	4 programs, 6 time zones/day, Independent setup for each day of the week	
<b>Main Unit Functions</b>	Frame Rate/Camera	Up to 60 fps (Depending on the camera)	
	Camera Control	Pan/Tilt, Zoom, Focus, Brightness, Preset position call and program (up to 256), Auto mode, Click centering, Wheel zoom, Zoom reset, Auto Back Focus, Aux, Wiper (for WV-SUD638)	
	Multiscreen Mode	<p><b>[Main monitor]</b></p> <ul style="list-style-type: none"> <li>Control screen 4 / 9 split screen display</li> <li>Wide view screen 2 / 3 / 4 / 5 / 6 / 7 / 9 split screen display, 1 screen sequence</li> </ul> <p><b>[Sub monitor]</b></p> <ul style="list-style-type: none"> <li>1 screen sequence, 4 / 9 split screen display</li> </ul>	
	Playback Control	PLAY, Rev PLAY, Pause, Stop, FF, FR, Prev Record, Next Record, Prev Image, Next Image, Go to Date, Go to Last (30 s), Time-saving playback	
	Search Mode	Search criteria : Time date, Playback by designating a timeline, VMD, Thumbnail	
	Copy	File Format: Original Format / MP4 Recorded data of selected cameras and time date range can be copied to USB storage.	
	Camera Title	Up to 16 Characters	
	Clock Display	Time : 12H/24H, Date : 5 formats	
	Digital Zoom	Live / Play: 1.25x 1.5x 1.75x, 2x, 2.5x, 3x, 3.5x 4x, 5x, 6x, 7x, 8x (only for 1-screen or 4-screen)	
	System Log	Operator access (500), Network error (100), Error (1,000), Event (1000), Operation (500)	
	System Setup	Setup page in English, French, Italian, Spanish, German, Portuguese, Thai, Vietnamese, Simplified Chinese, Traditional Chinese, Japanese	
	360 Camera Dewarp	Only 1ch display mode.	
	re-encoding	2Client (TBD)	
	SD Memory Data Download	Images recorded in the SD card in the i-PRO series cameras can be transferred to the recorder automatically. (H.265/H.264)	
	<b>Browser GUI</b>	Camera Control	Pan/Tilt, Zoom, Focus, Brightness, Preset position call and program (up to 256), Auto mode, Zoom reset, Aux, Wiper (for WV-SUD638)
		Playback Control	PLAY, Rev PLAY, Pause, Stop, FF, FR, Prev Record, Next Record, Prev Image, Next Image, Go to Date, Go to Last (30 s)
		Search Mode	Search criteria : Time date, Event type, Camera number
		Display Mode	1 screen
		Image Download	File Format: Original Format Recorded data of selected camera and time range can be downloaded to a PC. Viewer software can be downloaded separately.
		Copy	File Format: Original Format / MP4 Recorded data of selected cameras and time date range can be copied to USB storage.
Camera Title		Up to 16 characters	
Clock Display		On the browser. Time: 12H/24H, Date: 5 formats	
Alarm Control		Reset	
Digital Zoom		-	
System Log		Operator access (500), Network error (100), Error (1,000), Event (1000), Operation (500)	
GUI Language		English, French, Italian, Spanish, German, Portuguese, Thai, Vietnamese, Simplified Chinese, Traditional Chinese, Japanese	
Required PC		CPU: Intel® Core™ i7-860 or faster, RAM : 4 GB or more, VRAM: 128 MB or more (Min. 64 MB), Microsoft® DirectX® 9.0c or later (TBD)	

<b>Alarm/Event</b>	Alarm Source	4x Terminal inputs, 8x Camera alarms (TCP alarm notification), 128x Command alarms
	Event Mode	Off / On
<b>Input / Output</b>	Alarm Action	Alarm recording, E-mail notification, Alarm message, Camera positioning, Terminal output, TCP/HTTP alarm notification output, Buzzer, Indicator
	Alarm Control	Reset
<b>Network</b>	Event log	1000
	Monitor (HDMI) Connector	<p><b>[Main monitor]</b></p> <p>HDMI 4K UHD (3840x2160p) /30Hz, 4K UHD (3840x2160p) /25Hz, 1920x1080p /60Hz, 1920x1080p /50Hz</p> <p><b>[Sub monitor]</b></p> <p>HDMI 1920x1080p /60Hz, 1920x1080p /50Hz</p>
	Alarm / Control	Alarm input 4 *1, Alarm output *2 1
	Control	+5 V output *3, Emergency recording input, General purpose input *1/output *2
	Terminal	HDD error / Recording error output *2, Camera error output *2
	Mouse Connection Port	1 (USB 2.0)
	Network Port (PC)	1x 10BASE-T / 100BASE-TX / 1000BASE-T (RJ45)
	Network Port (Camera)	8x 10BASE-T / 100BASE-TX (RJ45), (RJ45, PoE+), PoE Budget (8 port Total : Max 110 W, Each port Max : 30 W)
	USB Storage	USB 3.0 / USB 2.0 memory, USB 3.0 / USB 2.0 connected HDD (except bus powered device)
	<b>Other Functions</b>	Network Interface
Maximum Recording Rate		64 Mbps (TBD)
Maximum Bandwidth		Total 128 Mbps (TBD)
Supported Protocol		IPv4: TCP/IP, UDP/IP, HTTP, HTTPS, SMTP, DNS, NTP, SNMP, RTP, RTSP, ICMP, ARP IPv6: ICMPv6
E-mail		Upon Alarm or Warning
No. of Simultaneous Users		16 or less (TBD)
User Registration		Up to 32 users
User Level		3 Levels (Programmable)
Partitioning		User level - Camera (View & Control, No Access)
Security Method		User authentication (ID and Password), Host authentication, Alteration detection, SSL/TLS
<b>HDD</b>	Time Synchronization	NTP (Server/Client)
	Summer Time	User definable (using menu setup)
	Remote Monitoring on Smartphone/Tablet	16 clients or less *4
	Type	3.5 inch
<b>Viewer Software</b>	Maximum Capacity	20 TB
	RAID	-
<b>General Specifications</b>	Playback Control	PLAY, Rev PLAY, Pause, FF, FR, Prev Record, Next Record, Prev Image, Next Image
	Additional Functions	Alteration detection, Save as JPEG, Two times zoom, Print, Copy, Aspect ratio switching, fish eye correction, corridor display
<b>General Specifications</b>	Supported OS, Language	Language of the software will be English or Japanese
	Safety / EMC Standard	UL (UL62368-1) c-UL (CAN/CSA C22.2 NO.62368-1) FCC (FCC Part15 Subpart B)
	Power Source	DC 54 V 2.78 A (TBD) (included AC power adapter)
	Power Consumption	150 W (TBD) (DC 54 V 2.78 A)
	Ambient Operating Temperature	Main body : 0 °C to +45 °C (0 °F to 113 °F) Mouse (provided) : +5 °C to +40 °C (41 °F to 104 °F)
	Ambient Operating Humidity	5 % to 90 % (without condensation)
	Maximum Operating Altitude	2,000 m (6,562 feet) above sea level
	Dimensions	340 mm(W) x 44 mm(H) x 230 mm(D) {13-3/8 inches (W) x 1-23/32 inches (H) x 9-1/16 inches (D)}
	Mass (approx.)	App 2.1 kg {4.6 lbs}

\*1 Non-voltage make contact input, +3.3 V pull-up Approx. 23 kΩ

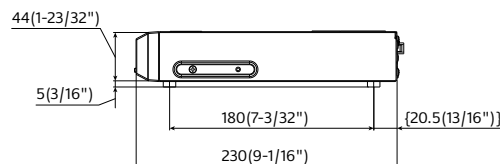
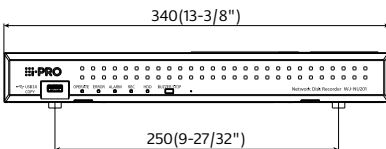
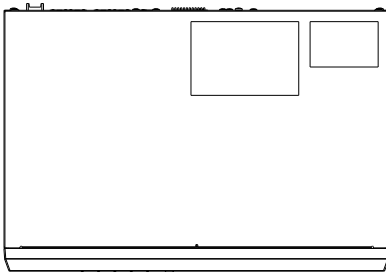
\*2 Open collector output, 24 V DC, -200 mA max.

\*3 +5V ±0.5 V 200 mA max.

\*4 i-PRO Mobile APP is required on smartphone/tablet PC.




# Appearance

Unit : mm (inches)



# Optional Accessories

## Rack mount bracket / Other

	Vertical installation	Rack mount	Wall
combination	1	1	1
	Vertical Mount Bracket <b>WV-QRM001</b> (Black)	Rack mount Bracket <b>WV-QRM101</b> (Black)	Wall mounting <b>WV-QRM201</b> (Black)
			

**Trademarks and registered trademarks**

- All other trademarks identified herein are the property of their respective owners.

**Important**

- Safety Precautions : Carefully read the Basic Information, Installation Guide and Operating Instructions before using this product.

- i-PRO Co., Ltd. cannot be held responsible for the performance of the network and/or other manufacturers' products used on the network.

• Masses and dimensions are approximate. • Specifications are subject to change without notice.

