




Overview:

- 5 Megapixel Resolution
- Day and Night with Superior Low Light Sensitivity and Adaptive IR LED
- 5x Zoom Lens with f2.7-13.5/F1.4-F3.3, Auto focus (for installation)
- Extreme WDR (125dB)
- Weather Proof Rating: IP66
- Vandal Proof: IK 10 Rated
- H.265 Compression Wide Angle
- Video Insight VMS License Included



Technical Specifications

Device	
Image Sensor	1/2.8 " Progressive Scan CMOS
Minimum Illumination	Color: 0.2 lux; B/W: 0.02 lux
Shutter Time	1/5-1/64000 Second (Manual Mode); 1/5-1/64000 Second (Auto Mode)
Lens	f2.7-13.5mm
WDR	Extreme WDR (125 dB)
Angle of View	Horizontal: 96.8° - 30.7°, Vertical: 70.4° - 23.1°
3-Axis Adjustment	Yes
Day / Night	Yes
Compression Standard	
Video Compression	H.265, H.264 (Main Profile), MJPEG
Bit Rate	Constant, Variable
Multi-Streaming	Simultaneous Triple Streams
Audio Compression	8 kHz, Mono, G.711
Analytics	Tampering Detection
Image	
Max. Image Resolution	2560 x 1920
Frame Rate	30 fps at (2560 x 1920, 2048 x 1536, 1920 x 1080, 1280 x 960, 1280 x 720, 800 x 600, 720 x 480, 640 x 480, 320 x 240)
Image Setting	White Balance, Brightness, Backlight Compensation, Contrast, Saturation, Sharpness, Automatic Gain Control, Flickerless, Digital Image Stabilizer (DIS, EIS), Defogging
Network	
Analytics and Alarm Trigger	Video Motion Detection (3 regions), External Device Through Digital Input, Sound Detection, Tampering Detection
Protocols	IPv4/v6, TCP, UDP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, NTP, RTP, RTSP, RTCP, SMTP, FTP, IGMP, ICMP, ARP, Bonjour, UPnP, QoS, SNMP, IEEE 802.1X
Security	IP Address Filtering, HTTPS Encryption, Password Protected User Level, Anonymous Login
System Compatibility	ONVIF Compliant (Profile S, Profile G, Profile T, Profile Q)

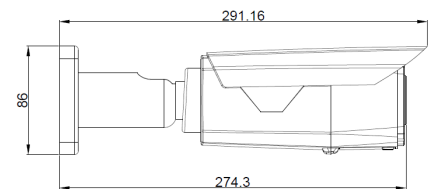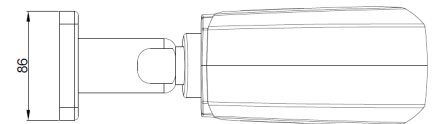

Technical Specifications

Interface	
Communication Interface	1 x Ethernet (10/100 Base-T), RJ-45 Connector
Local Storage	MicroSDHC, MicroSDXC Memory Card Slot (Card Not Included)
General	
Operating Temperature	-30°C ~ 50°C (-22°F ~ 122°F)
Power Supply	DC 12V, PoE Class 3 (IEEE802.3af)
Power Consumption	12.95 W (PoE)
IR Range	30m
Impact Protection	IK10
Protection Level	IP66
Dimensions	(Ø x L): 80mm x 258.30mm (3.149" x 10.169")
Software	Includes Video Insight VMS License
Warranty	4 Year Advanced Replacement
Accessories	B-0517-PM  B-0706-JB 