

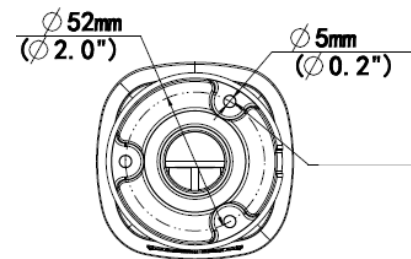
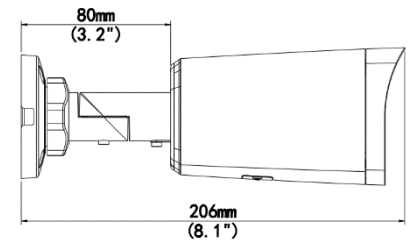
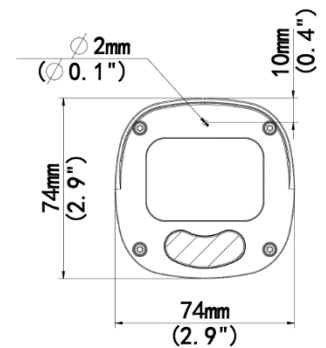
Overview

- 2MP (1920*1080)
- WDR 120dB
- 2.8 - 12mm Lens
- H.265, H.264 and MJPEG
- IR, IP67






Technical Specifications

Device	
Image Sensor:	1/2.7", 2.0-megapixel, progressive scan, CMOS
Min Illumination:	Color: 0.005Lux (F1.6, AGC ON) 0Lux with IR
Shutter Time:	Auto/Manual, 1 ~ 1/100000s
Lens:	2.8 ~ 12mm, AF automatic focusing and motorized zoom lens
WDR:	120dB
Angle of View:	H: 108.05°~ 32.59° V: 56.81°~ 18.36°, 111.91°~36.53°
Angle Adjustment:	Pan: 0° ~ 360° Tilt: 0° ~ 90° Rotate: 0° ~ 360°
3-Axis Adjustment:	Yes
Day & Night:	IR-Cut Filter with Auto Switch (ICR)
IR Range:	Up to 50m (164ft) IR range
Compression Standard	
Video Compression:	H.265, H.264, MJPEG
Video Bit Rate:	128 Kbps ~ 6 Mbps
Two Stream:	Yes
Analytics:	Cross line, intrusion (based on human body detection) motion detection, tampering alarm, audio detection
Image	
Max. Image Resolution:	1920 x 1080
Frame Rate:	30fps (1920 x 1080)
ROI Codec:	Up to 8 areas
Image Setting:	White Balance, Digital Noise Reduction, Smart IR, Flip, HLC, BLC, Defog



Technical Specifications

Network	
Protocols:	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, RTMP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL/TLS, QoS, SNMP
Interface	
Communication Interface:	10M/100M Base-TX Ethernet
Built-in Microphone	Yes
Audio	
Compression	G.711
Storage	
Edge Storage	Micro SD, up to 128GB
General	
Safety	CE: EN 62368-1 UL: UL 62368-1
EMC	FCC: FCC Part 15 CE-EMC: EN 55032/ EN 55035/ EN IEC 61000-3-2/ EN 61000-3-3
Operating Conditions:	Temperature: -30°C~60°C(-22°F~140°F), Humidity: ≤95%RH (Non-Condensing)
Power Consumption:	Max 8.5 W
Power Supply:	DC 12V±25%, PoE (IEEE 802.3af)
Weatherproof Rating:	IP67
Dimensions:	206 × 74 × 74mm (8.1" × 2.9" × 2.9")
Net Weight:	0.54kg (1.19lb)
Material	Metal
Software:	No license required for use with Video Insight Software
Optional Accessories	<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <p>M-JB-MINI-B</p>  </div> <div style="text-align: center;"> <p>M-PM-B</p>  </div> <div style="text-align: center;"> <p>M-NPT34</p>  </div> </div>

© i-PRO Co., Ltd. All Rights Reserved. i-PRO, Viewnetcam.com, Advidia, VideoInsight, CloUDE, and Unified Digital Evidence are registered trademarks or trademarks of i-PRO Co., Ltd., or i-PRO Americas Inc. in various jurisdictions. All other trademarks are the property of their respective owners.