



Overview

- 4 Megapixel IR
- True WDR 120dB
- 2.8 – 12mm Motorized Lens
- H.265
- IP67






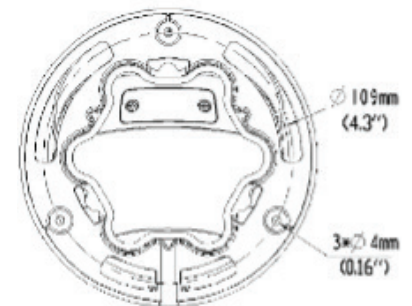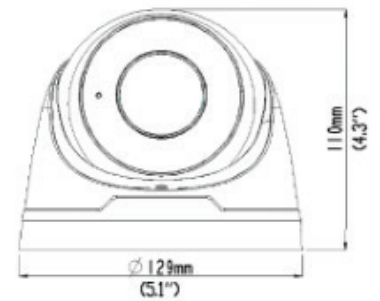

Technical Specifications

Device	
Image Sensor:	1/3", 4.0 Megapixel, Progressive Scan, CMOS
Min Illumination:	Color: 0.003Lux (F1.6, AGC ON) 0Lux with IR
Shutter Time:	Auto/Manual, 1 ~ 1/100000s
Lens:	2.8 ~ 12mm, AF Automatic Focusing and Motorized Zoom Lens
WDR:	120dB
Angle of View:	H:102.79°~ 30.86°, V: 54.50°~ 17.49°, O: 106.94°~35.49°
Angle Adjustment:	Pan: 0° ~ 360° Tilt: 0° ~ 75° Rotate: 0° ~ 360°
3-Axis Adjustment:	Yes
Day & Night:	IR-Cut Filter with Auto Switch (ICR)
IR Range:	Up to 40m (131ft) IR range
Compression Standard	
Video Compression:	Ultra 265, H.265, H.264, MJPEG
Video Bit Rate:	128 Kbps~16 Mbps
Dual Streams:	Yes
Analytics:	Intrusion, Human Body Detection, Motion Detection, Tampering Alarm, Audio Detection
Image	
Max. Image Resolution:	2688 x 1520
Frame Rate:	25fps (2688 x 1520)
ROI Codec:	Up to 8 areas
Image Setting:	White Balance, Digital Noise Reduction, Smart IR, Flip, HLC, BLC, Defog



Technical Specifications

Network	
Alarm Channels:	–
Protocols:	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, RTMP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL/TLS, Qos, 802.1x, SNMP
Interface	
Communication Interface:	10M/100M Base-TX Ethernet
Local Storage:	Micro SD, up to 256GB
Audio:	Built-in Mic
General	
Safety	CE: EN 60950-1 UL: UL60950-1 IEC 60950-1
EMC	FCC: FCC Part15
Operating Conditions:	Temperature: -30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (Non-Condensing)
Power Consumption:	Max 8.0W
Power Supply:	DC 12V±25%, PoE (IEEE 802.3af)
Weather Proof Rating:	IP67
Vandal Resistant:	–
Dimensions:	Φ129 x 110mm (Ø5.1" x 4.3")
Weight:	0.67kg (1.48lb)
Software:	Includes Video Insight VMS License
Accessories	<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <p>M-JB-T</p>  </div> <div style="text-align: center;"> <p>M-WM-T</p>  </div> <div style="text-align: center;"> <p>M-PM</p>  </div> </div> <div style="display: flex; justify-content: space-around; align-items: flex-start; margin-top: 20px;"> <div style="text-align: center;"> <p>M-Pendant-Ex</p>  </div> <div style="text-align: center;"> <p>M-Pendant</p>  </div> </div>

R071222 | Product specifications and availability are subject to change without notice.

© i-PRO Co., Ltd. All Rights Reserved. i-PRO, Viewnetcam.com, Advidia, VideoInsight, CloUDE, and Unified Digital Evidence are registered trademarks or trademarks of i-PRO Co., Ltd. or i-PRO Americas Inc. in various jurisdictions. All other trademarks are the property of their respective owners.