


Model number	ClearSight coating	Color
WV-S15500-V3LN	Yes	i-PRO white
WV-S15500-V3L	No	i-PRO white
WV-S15500-V3LNJ	Yes	i-PRO white
WV-S15500-V3LN1	Yes	Black
WV-S15500-V3LK	Yes	i-PRO white (Heavy salt damage resistance)
WV-S15600-V2L	No	i-PRO white
WV-S15600-V2LN	Yes	i-PRO white
WV-S15700-V2LN	Yes	i-PRO white
WV-S15700-V2L	No	i-PRO white
WV-S15700-V2LNJ	Yes	i-PRO white
WV-S15700-V2LK	Yes	i-PRO white (Heavy salt damage resistance)
WV-S15700-V2LKJ	Yes	i-PRO white (Heavy salt damage resistance)
WV-S15500-F3L	No	i-PRO white
WV-S15500-F6L	No	i-PRO white
WV-S15500-V3LNV	Yes	i-PRO white
WV-S15600-V2LNV	Yes	i-PRO white
WV-S15700-V2LNV	Yes	i-PRO white
WV-S15500-F3LV	No	i-PRO white
WV-S15500-F6LV	No	i-PRO white
WV-S15500-V3LN1V	Yes	Black
WV-S15500-V3LKV	Yes	i-PRO white (Heavy salt damage resistance)

	投影面積/Projected area
平面図/Top-view	0.033 (m ²)
側面図/Side-view	0.030 (m ²)


Mass : Approx. 2.4 kg {5.3 lbs}

	縦 / Vertical		横 / Horizontal		使用ねじ(個数) / Screw (pcs)
A	83.5 mm	82.5 mm	46 mm	47.6 mm	M4 (4個 / 4 pcs)
B	46 mm	47.6 mm	83.5 mm	82.5 mm	M4 (4個 / 4 pcs)
C	83.5 mm	83.3 mm	-		M4 (2個 / 2 pcs)
D	-		83.5 mm	83.3 mm	M4 (2個 / 2 pcs)
E	63 mm		63 mm		M4 (4個 / 4 pcs)
F	85.7 mm		85.7 mm		M4 (4個 / 4 pcs)

注) 上表の寸法公差は±0.2 mm / Tolerance ±0.2 mm

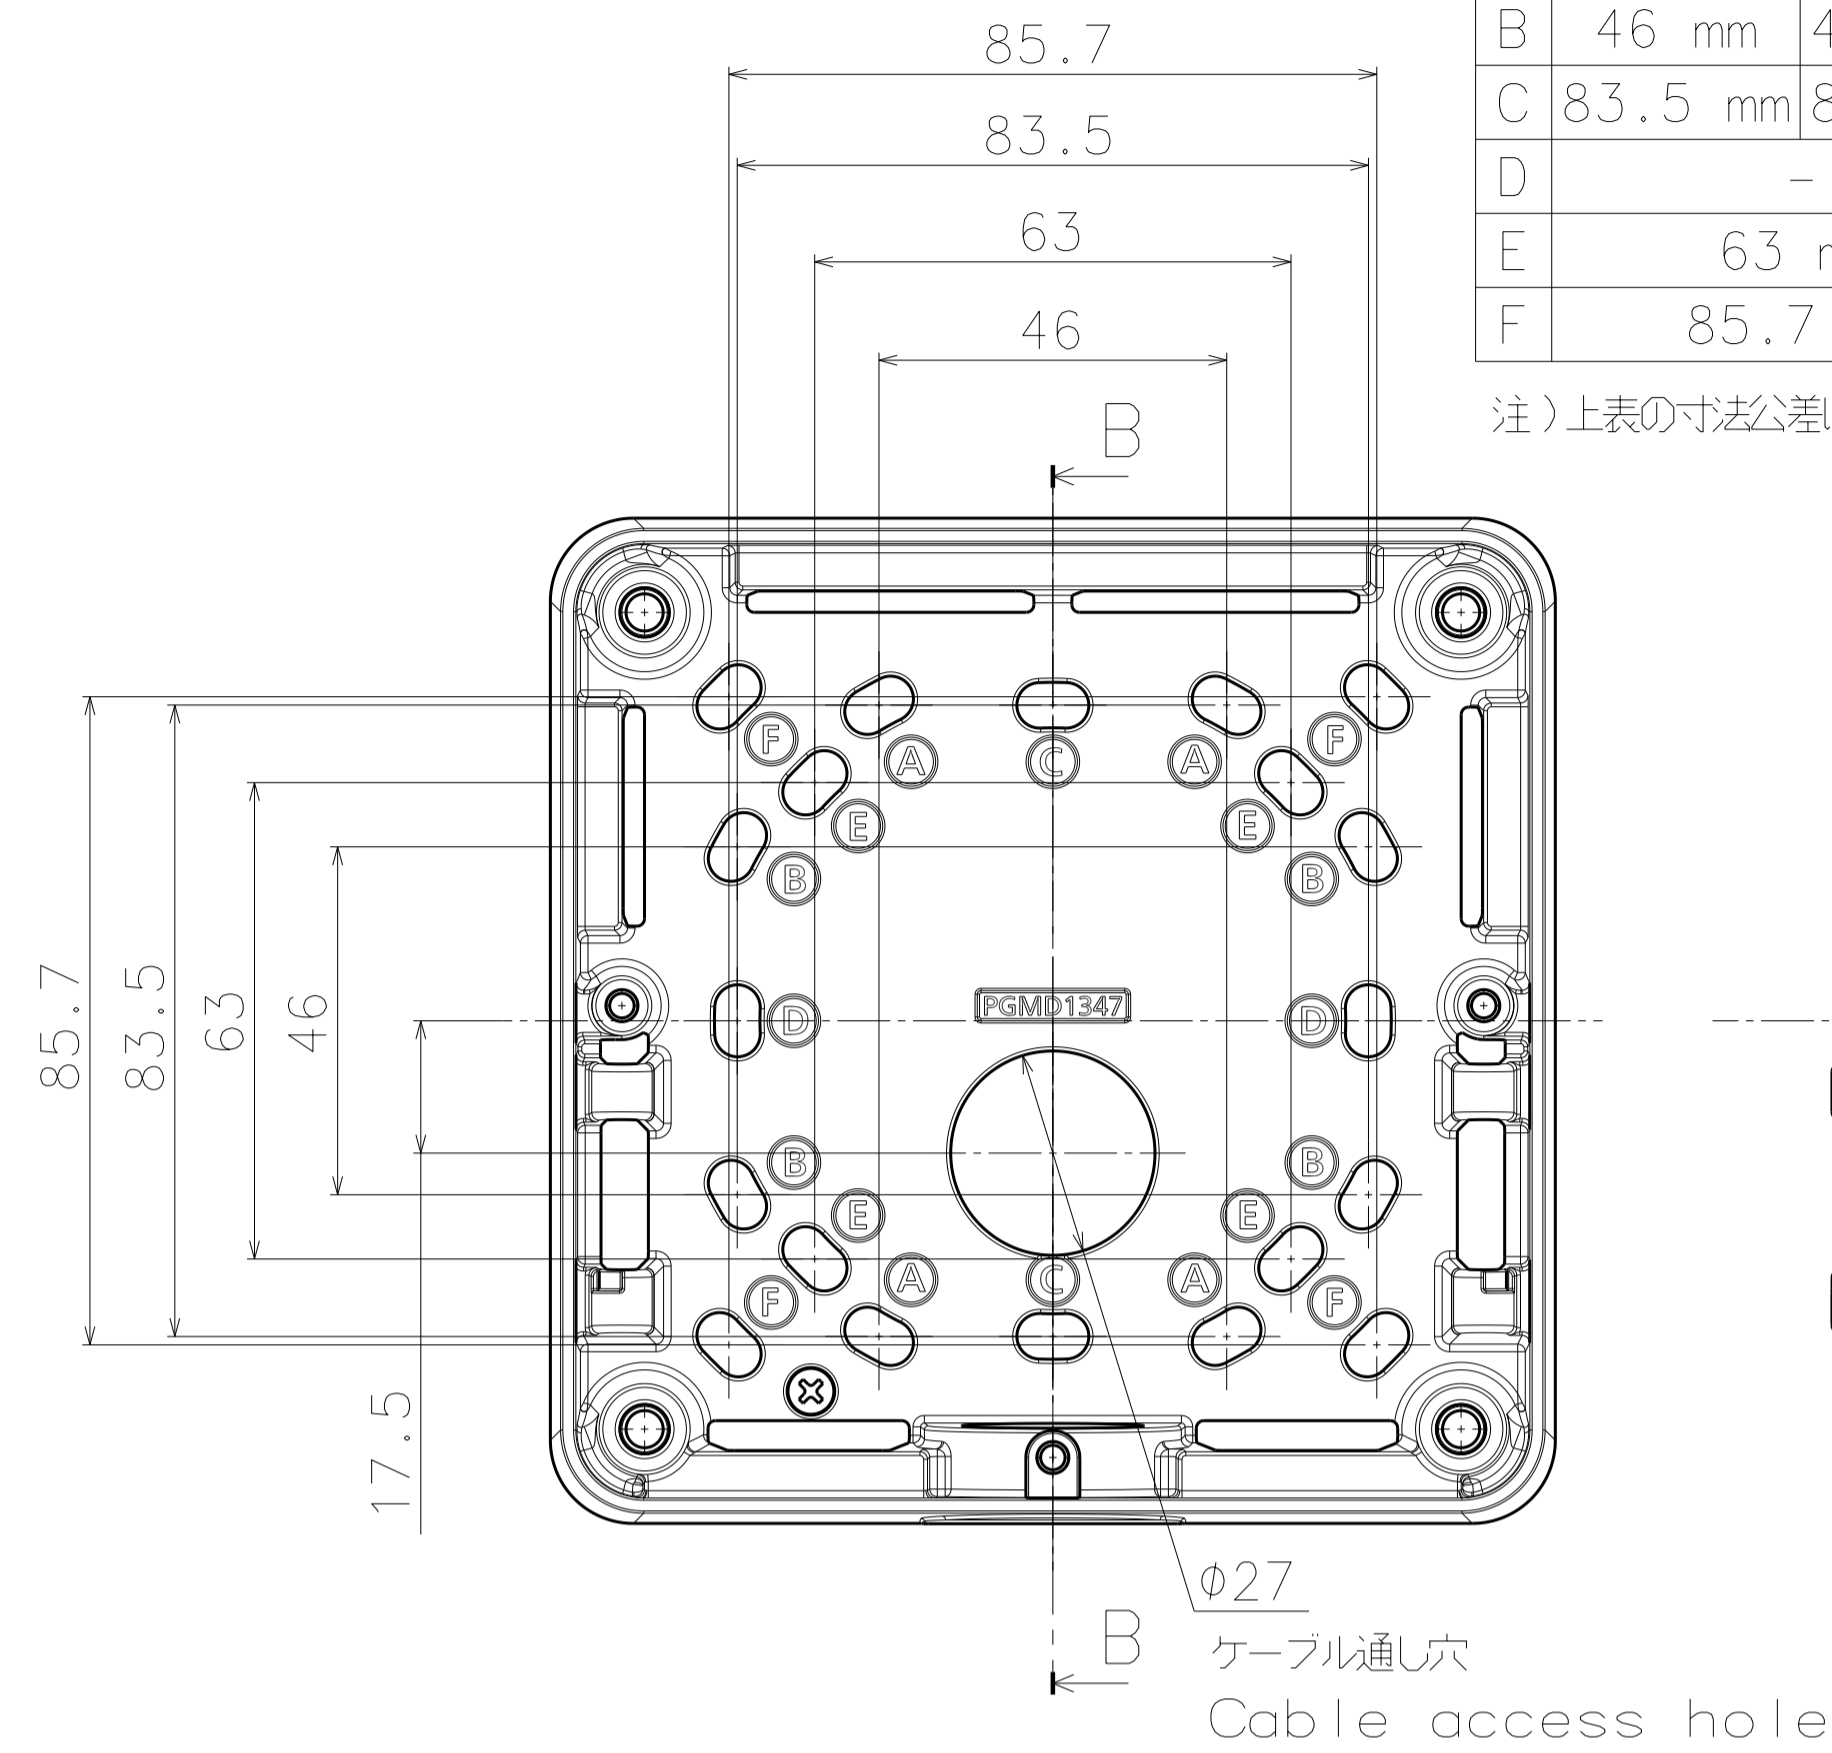


Mounting hole layout

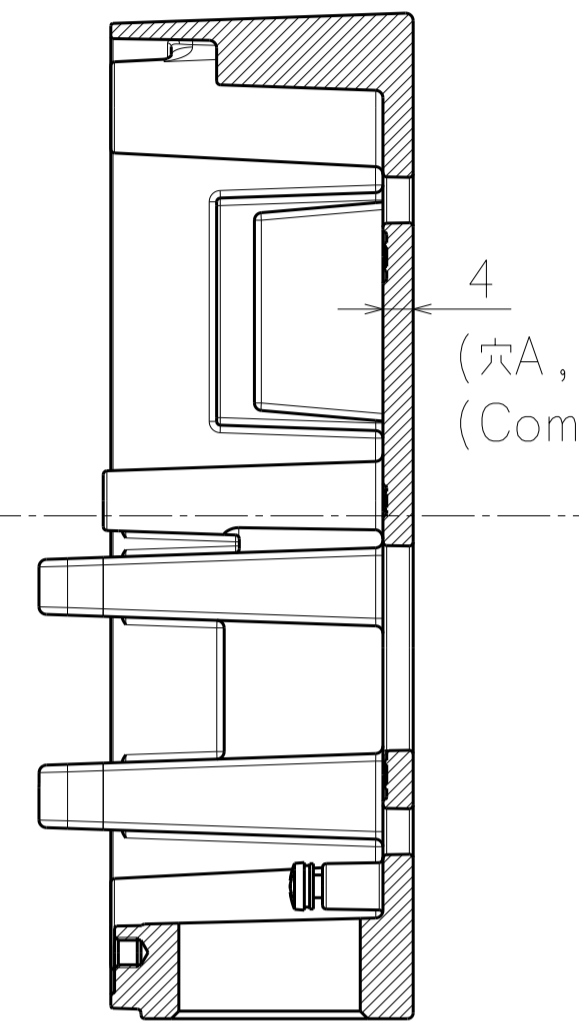


4
(穴A,B,C,D,E,F部共通)
(Common to holes A, B, C, D, E and F)


SecB-B

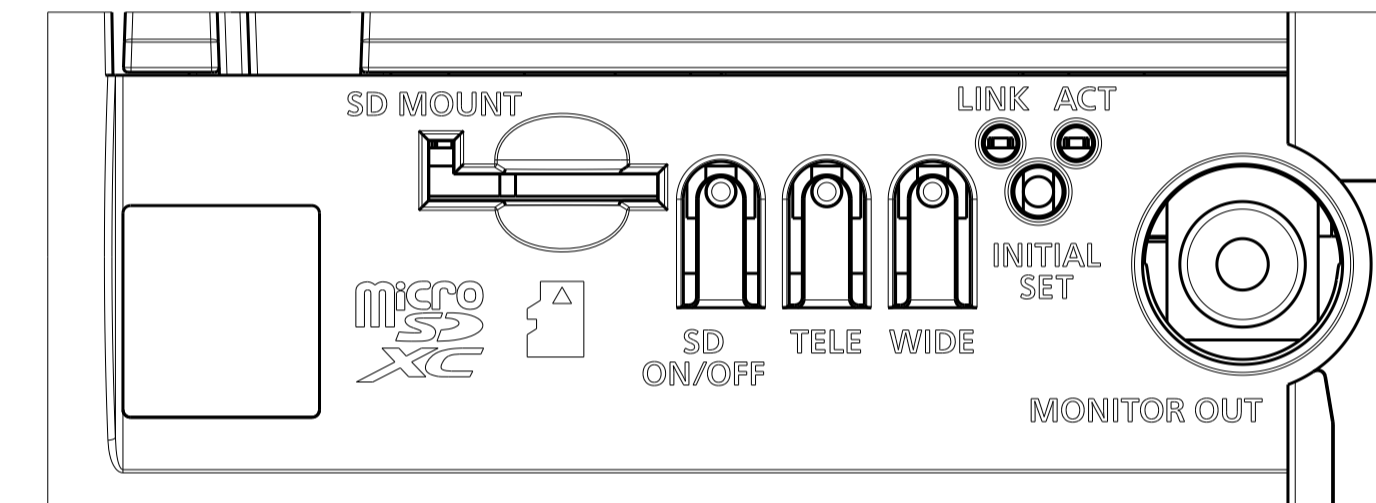



Detail A (2:1)

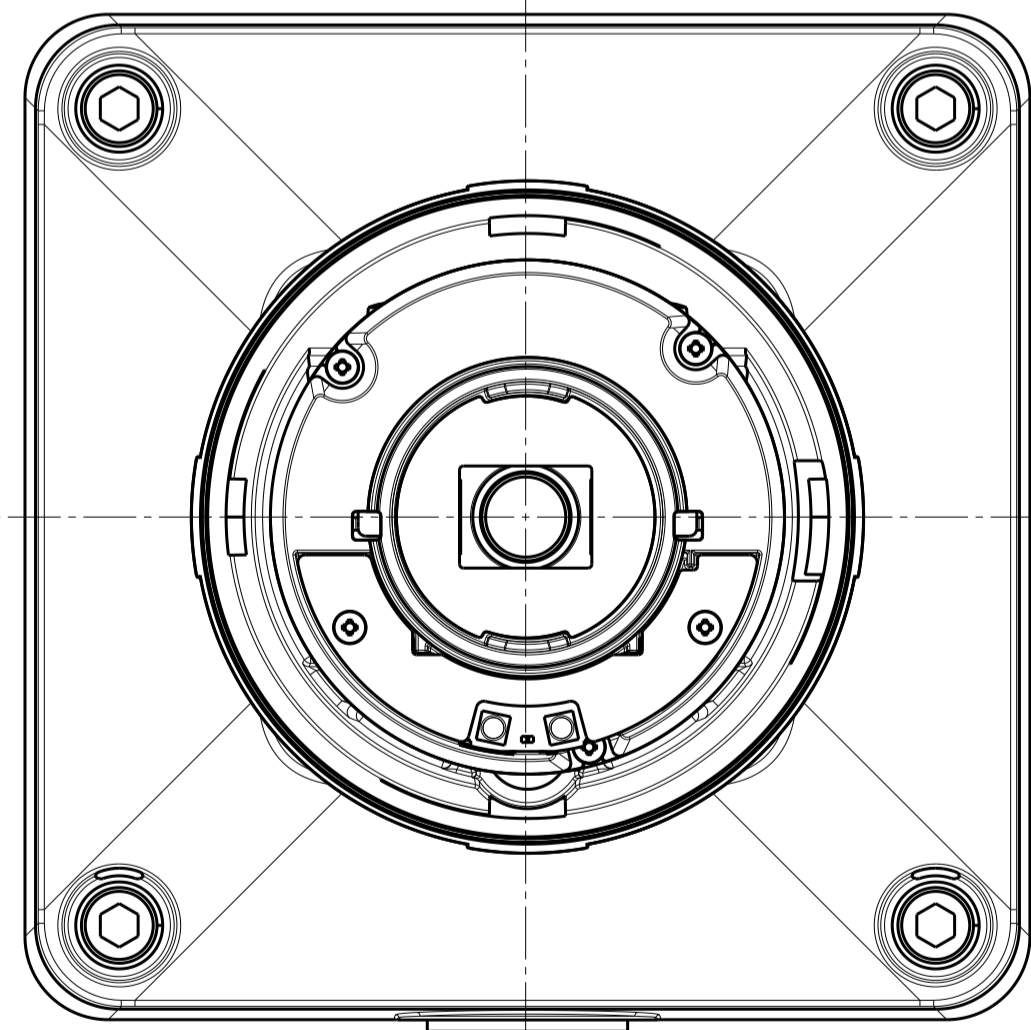


Lens type : 5M FIX

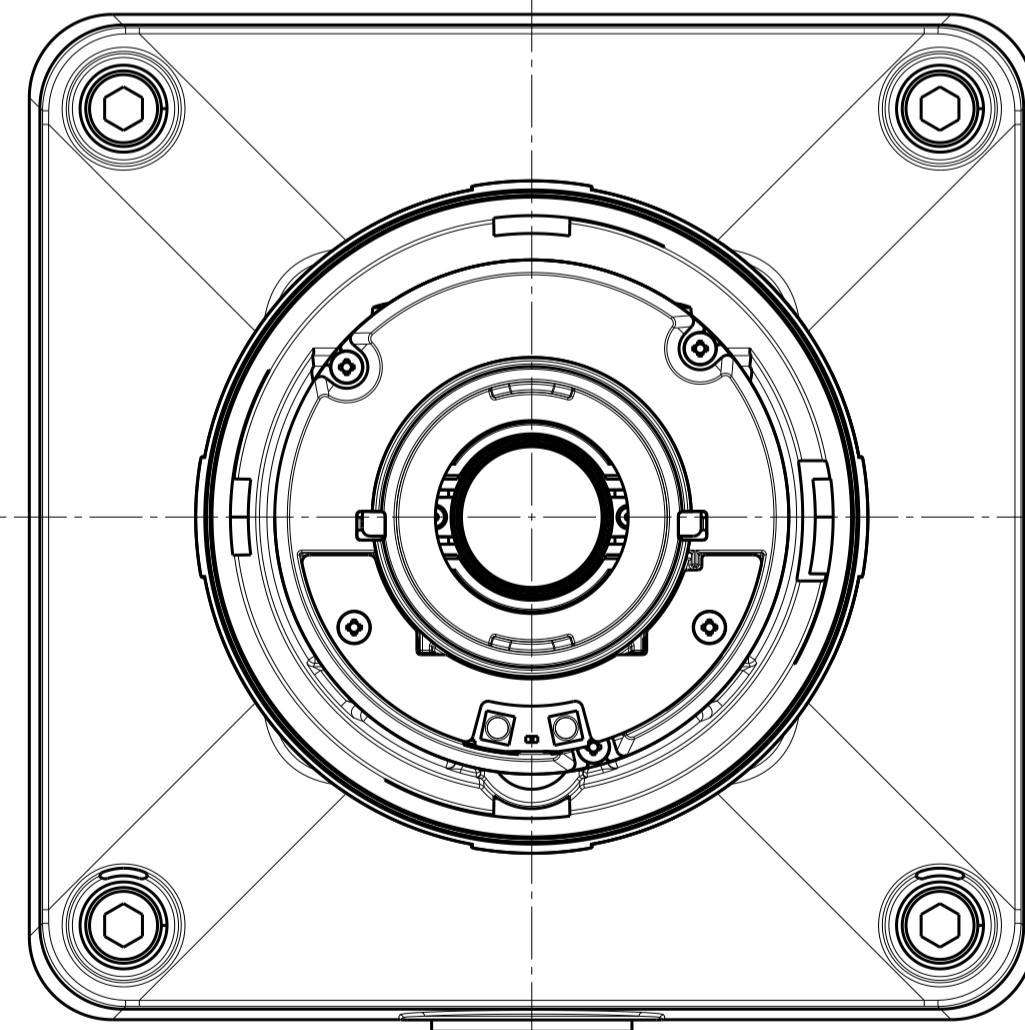



Lens type : 5M, 6M, 4K

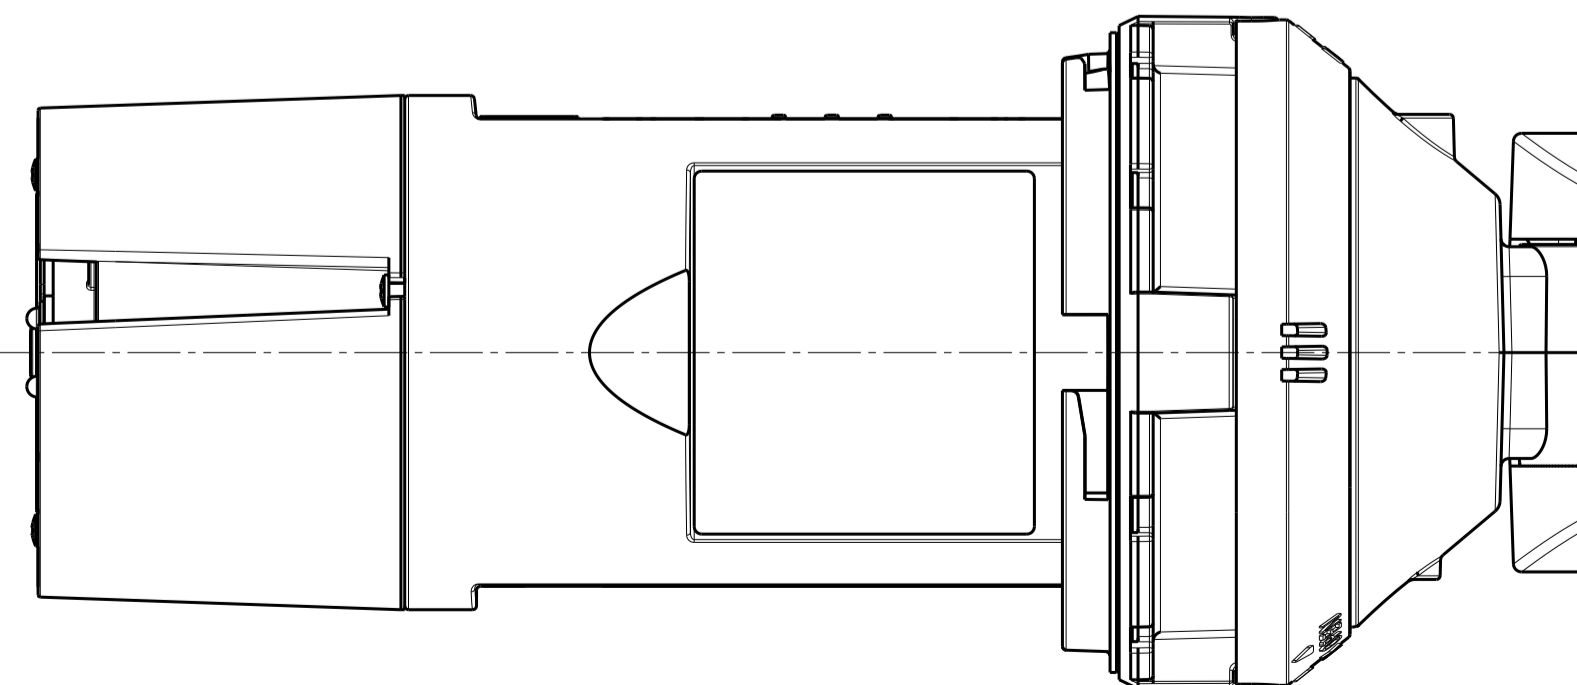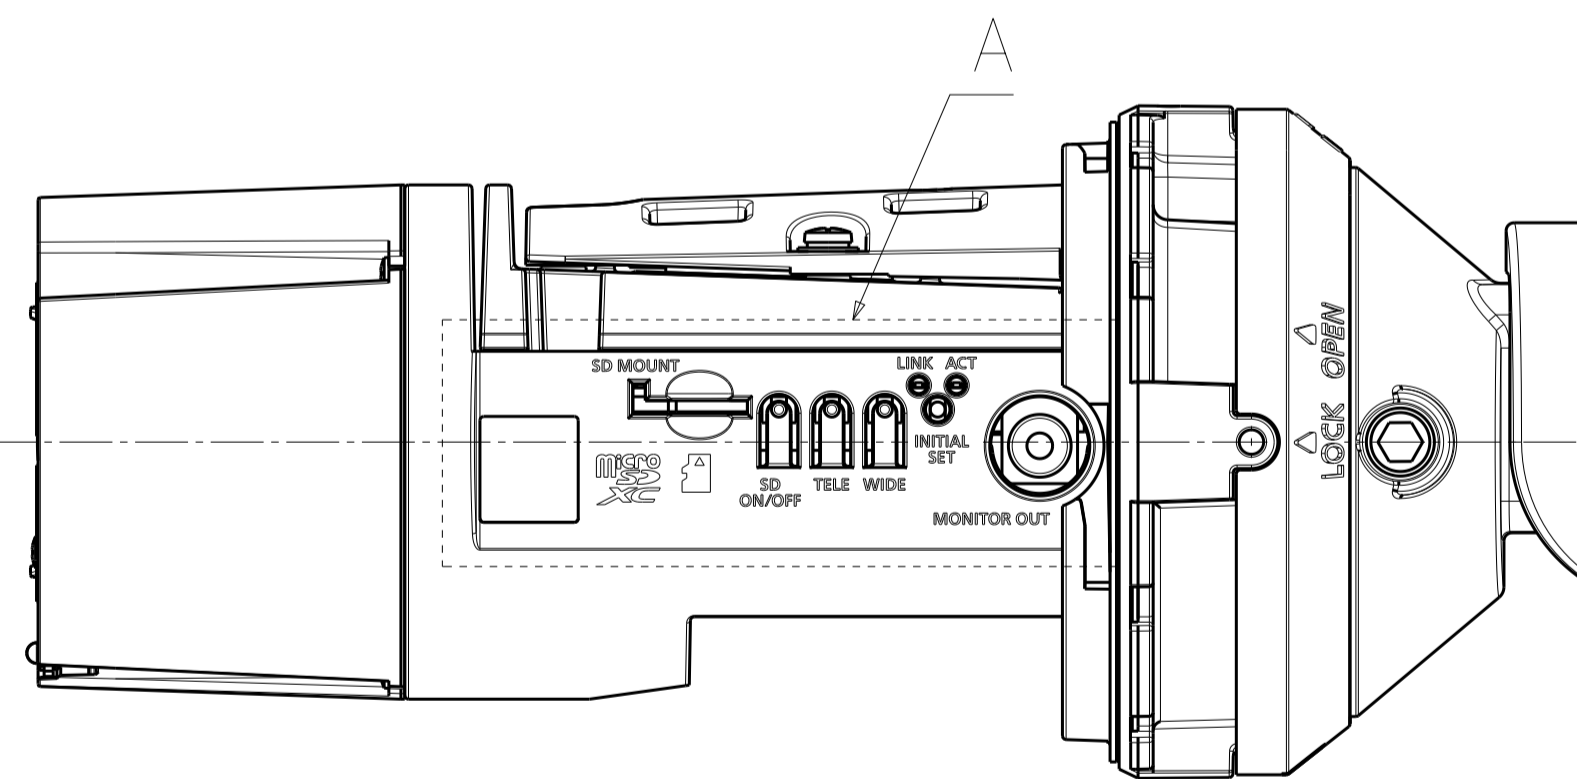




Model number	Lens type
WV-S15500-V3LN	5M
WV-S15500-V3L	
WV-S15500-V3LNJ	
WV-S15500-V3LN1	
WV-S15500-V3LK	
WV-S15600-V2L	6M
WV-S15600-V2LN	
WV-S15700-V2LN	
WV-S15700-V2L	4K
WV-S15700-V2LNJ	
WV-S15700-V2LK	
WV-S15700-V2LKJ	
WV-S15500-F3L	5M FIX
WV-S15500-F6L	
WV-S15500-V3LNV	5M
WV-S15600-V2LNV	6M
WV-S15700-V2LNV	4K
WV-S15500-F3LV	5M FIX
WV-S15500-F6LV	
WV-S15500-V3LN1V	5M
WV-S15500-V3LKV	

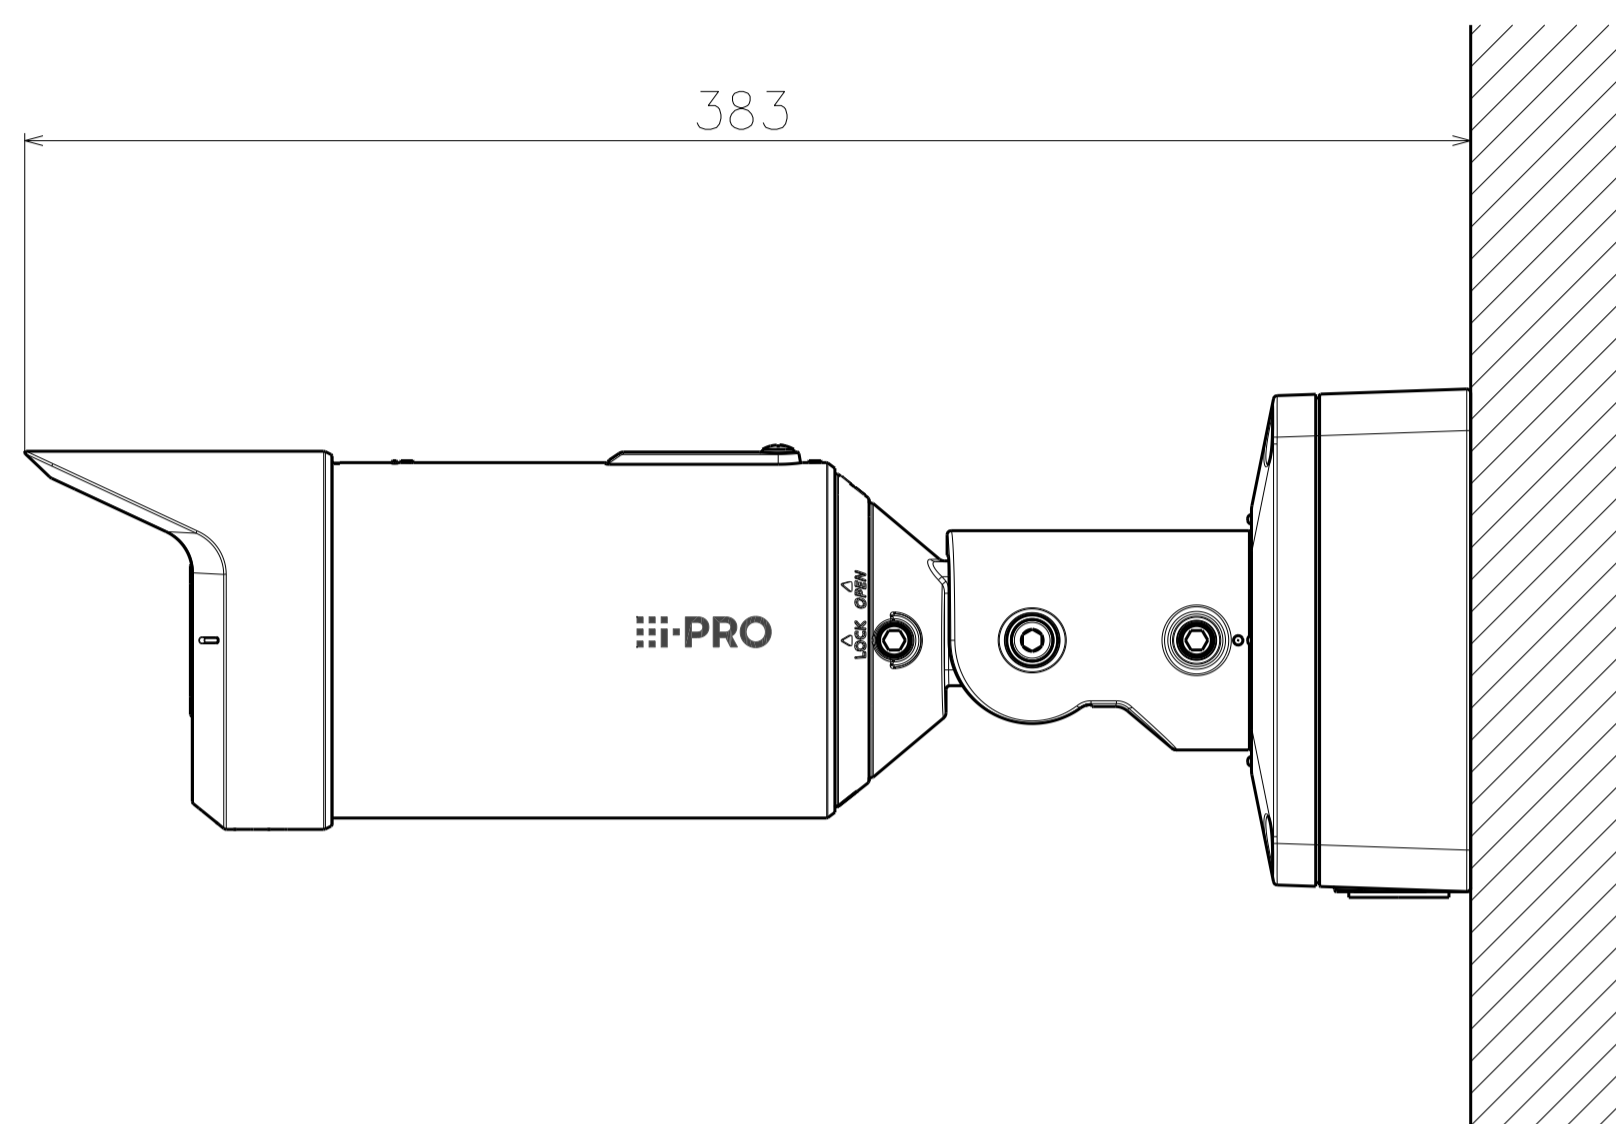


工事後の取付状態
Mounted state after construction

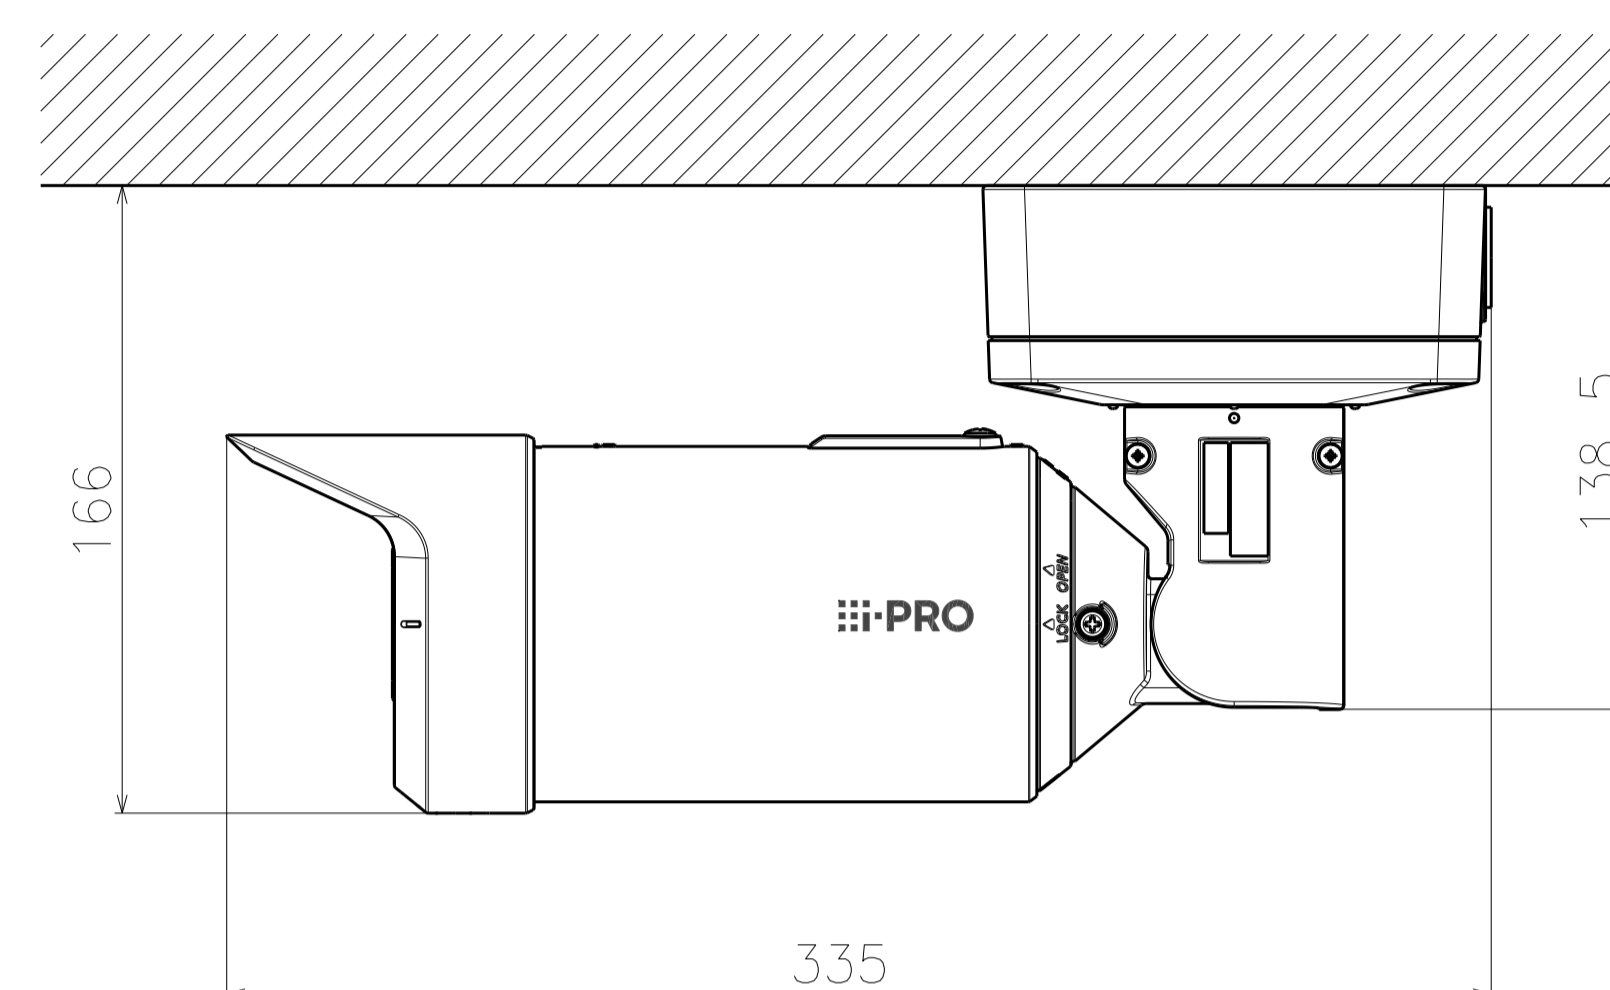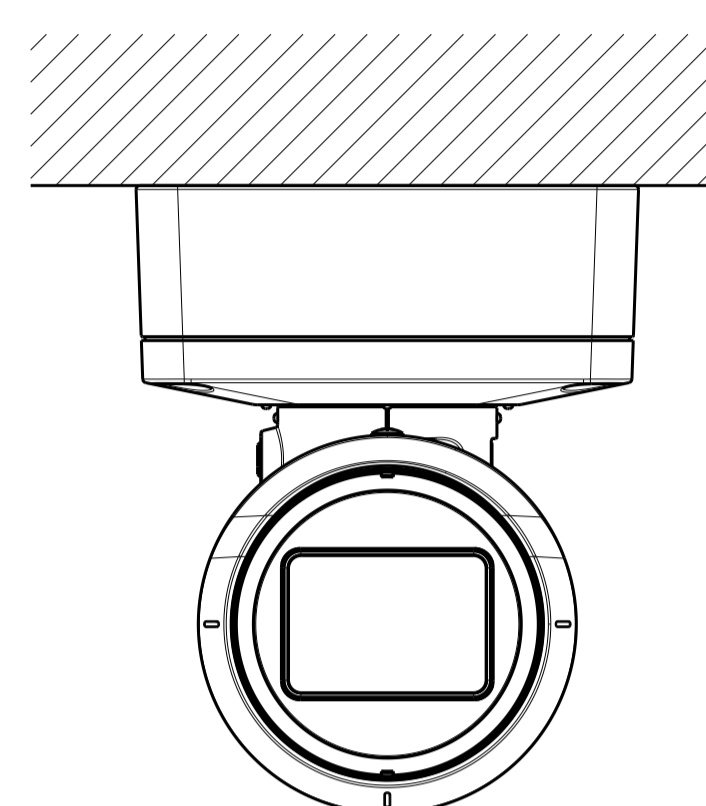

工事後の取付状態
Mounted state after construction

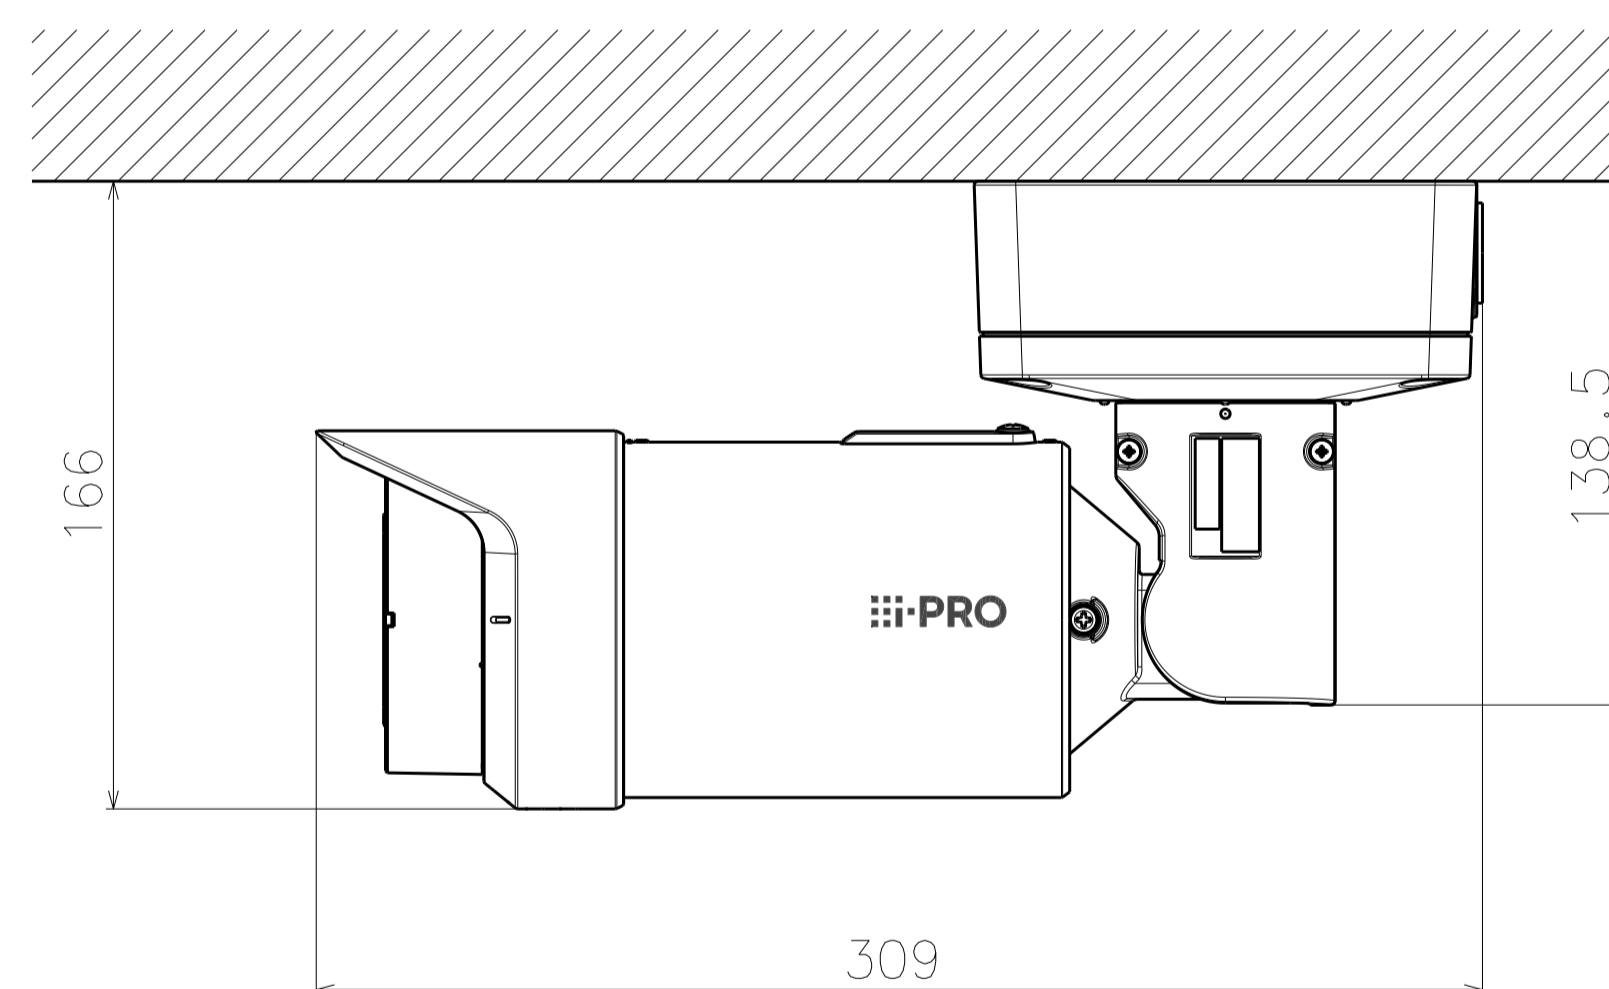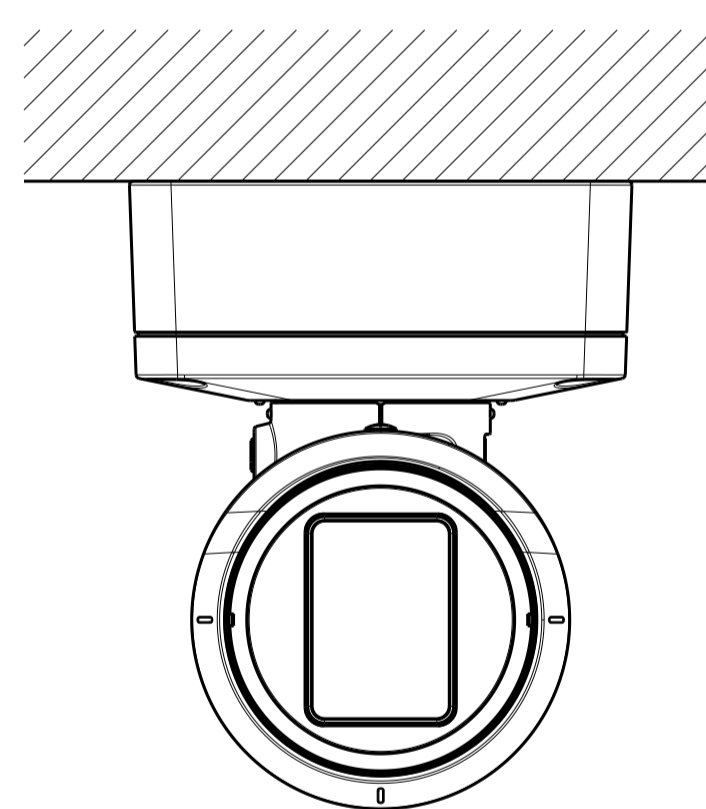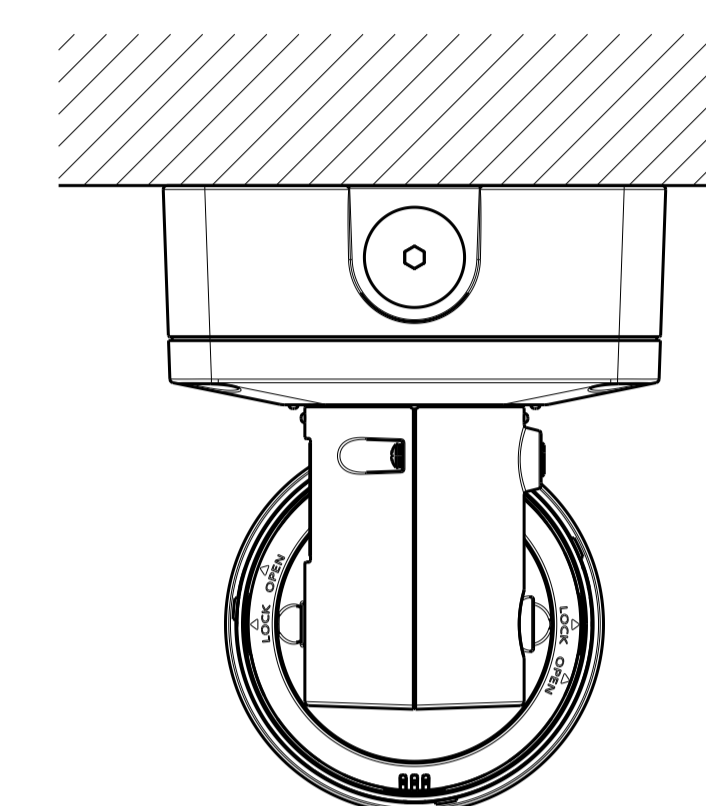

サンシェードを回転させた場合の設置状態
Installation condition for rotating the sunshade

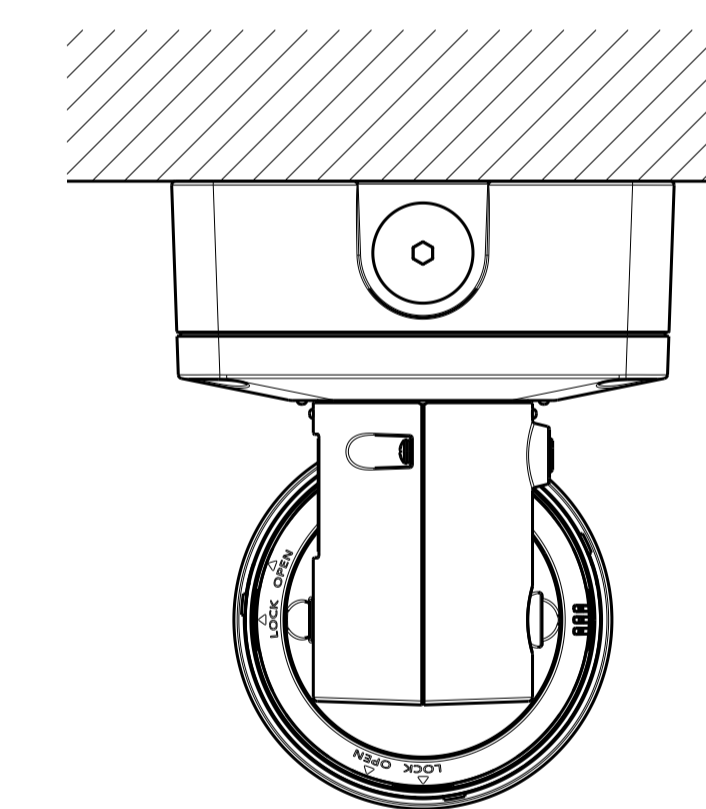

Model number
WV-S15500-V3LN
WV-S15500-V3L
WV-S15500-V3LNJ
WV-S15500-V3LN1
WV-S15500-V3LK
WV-S15600-V2L
WV-S15600-V2LN
WV-S15700-V2LN
WV-S15700-V2L
WV-S15700-V2LNJ
WV-S15700-V2LK
WV-S15700-V2LKJ
WV-S15500-F3L
WV-S15500-F6L
WV-S15500-V3LNV
WV-S15600-V2LNV
WV-S15700-V2LNV
WV-S15500-F3LV
WV-S15500-F6LV
WV-S15500-V3LN1V
WV-S15500-V3LKV