



Overview

- 4 Megapixel IR
- True WDR 120dB
- 2.8mm to 12mm Varifocal Lens
- H.265, H.264, MJPEG
- Support 9:16 Corridor Mode
- IP67, IK10
- Built-in Mic
- NDAA Compliant
- ONVIF Profile G, S, T





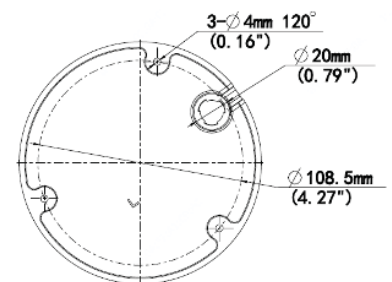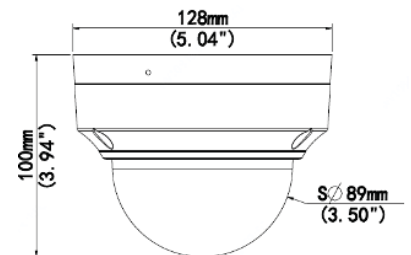


Technical Specifications

Device	
Image Sensor:	1/3", 4.0 Megapixel, Progressive Scan, CMOS
Min Illumination:	Color: 0.003Lux (F1.6, AGC ON) 0Lux with IR
Shutter Time:	Auto/Manual, 1 ~ 1/100000s
Lens:	2.8 ~ 12mm, AF automatic focusing and motorized zoom lens
WDR:	120dB
S/N:	>56dB
Angle of View:	H: 102.79°~ 30.86°, V: 54.50°~ 17.49°, O: 106.94°~35.49°
Angle Adjustment:	Pan: 3° ~ 360° Tilt: 0° ~ 70° Rotate: 3° ~ 360°
3-Axis Adjustment:	Yes
Day & Night:	IR-cut filter with auto switch (ICR)
IR Range:	IR Range Up to 40m (131ft) IR range
Compression Standard	
Video Compression:	H.265, H.264, MJPEG
Video Bit Rate:	128 Kbps~16 Mbps
Tri-Stream:	Yes
Analytics:	Cross line, Intrusion (based on Human Body Detection) Motion Detection, Tampering Alarm, Audio detection
Image	
Max. Image Resolution:	2688 x 1520
Frame Rate:	25fps (2688 x 1520)
ROI Codec:	Up to 8 Areas
Image Setting:	White Balance, Digital Noise Reduction, Smart IR, Flip, HLC



Technical Specifications

Network					
Protocols:	IPv4,IPv6, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, RTMP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL/TLS, QoS, 802.1x, SNMP				
Interface					
Communication Interface:	10M/100M Base-TX Ethernet				
Edge Storage:	Micro SD, up to 256GB				
Audio Compression:	G.711U, G.711A				
DORI					
DORI	Lens (mm)	Detect (m)	Observe (m)	Recognize (m)	Identify (m)
Distance	2.8	63.0	25.2	12.6	6.3
	12	270.0	108.0	54.0	27.0
General					
Safety	CE: EN 62368-1 UL: UL 62368-1				
EMC	FCC: FCC Part 15 CE-EMC: EN 55032/ EN 55035/ EN IEC 61000-3-2/ EN 61000-3-3				
Operating Conditions:	Temperature: -30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing)				
Power Consumption:	Max 7.5W				
Power Supply:	DC 12V±25%, PoE (IEEE 802.3af)				
Weather Proof Rating:	IP67				
Vandal Resistant:	IK10				
Dimensions:	Φ128mmx100mm (Ø5.0" x 3.9")				
Weight:	0.65kg (1.43lb)				
Software:	No license required for use with Video Insight Software				
Optional Accessories					
	<p>M-JB-T</p> 		<p>M-WM-T</p> 		<p>M-PM</p> 
	<p>M-Pendant-Ex</p> 		<p>M-Pendant</p> 		

© i-PRO Co., Ltd. All Rights Reserved. i-PRO, Viewnetcam.com, advidia, VideoInsight, ClouDE, and Unified Digital Evidence are registered trademarks or trademarks of i-PRO Co., Ltd. or i-PRO Americas Inc. in various jurisdictions. All other trademarks are the property of their respective owners.

advidia

M-46-V

4MP WDR VF Dome IP Camera

i-pro.com/advidia