


How to attach the fall-prevention chain to the wall


After performing Step ④ of “Step 9 Installing the camera.”, proceed to Step ⑤ below.

⑤ Attach the fall-prevention chain (accessory) to the foundation area of the architecture or where sufficient strength is assured. Prepare the fixing screw or anchor according to the material of the area where the fall-prevention chain is to be installed.


A) Remove the fall-prevention chain again from the ring of the camera mount base.

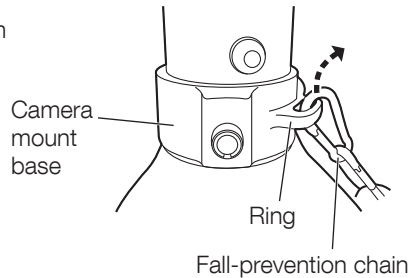

B) Attach the fall-prevention chain lug (accessory) to the fall-prevention chain removed in Step A).

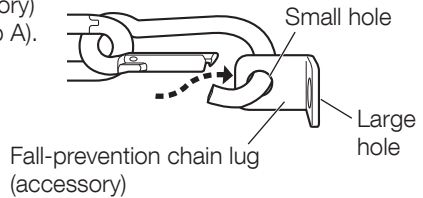

C) Fix the fall-prevention chain to the installation surface using the fall-prevention chain lug (accessory) and the fixing screw or anchor (M6: locally procured).

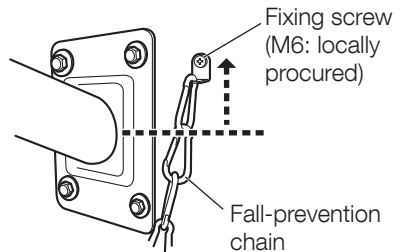

IMPORTANT:

- Fixing screw or anchor (M6: locally procured)
Minimum pull-out force: 724 N {163 lbf}
- Fix the fixing screw or anchor to a location on the wall higher than the center of the base of the wall mount bracket.

Proceed to “Step 10 Turn the power on and check the screen on the computer.”.