

Super Dynamic Full HD Dome Network Camera WV-SFN130

Super Dynamic HD Dome Network Camera
WV-SFN110



*i-VMD Type2 : Intruder Detection / Loitering Detection / Direction Detection / Scene Change Detection / Object Detection / Cross Line Detection

Full HD / 1,920 x 1,080 Compact Dome Network Camera (WV-SFN130) HD / 1,280 x 720 Compact Dome Network Camera (WV-SFN110)

Key Features

- 1080p Full HD images up to 30 fps (WV-SFN130)
- 720p HD images up to 30 fps (WV-SFN110)
- Multiple H.264 (High profile) streams and JPEG streams ensure simultaneous real time monitoring and high resolution recording.
- Super Dynamic and ABS (Adaptive Black Stretch) technologies deliver 122 dB wider dynamic range compared to conventional cameras.
- Face Super Dynamic Range technology ensures clear face image.
- High sensitivity with Day/Night (Electrical) function :
 0.1 lx (Color), 0.08 lx (B/W) at F2.3 (WV-SFN130)
- 0.14 k (Color), 0.08 k (b/w) at F2.3 (W-SFN130) 0.04 k (Color), 0.03 k (B/W) at F2.3 (WV-SFN110)
- **VIQS** (Variable Image Quality on Specified area) technology allows the designated **eight areas** to retain higher image quality while the excluded area will have a decreased image quality, which enables to use lower image file size and bit rate.
- Smart coding Technology :

Group of Pictures (GOP) control function removes unnecessary information from the frame for realizing efficient encoding. Auto VIQS (Variable Image Quality on Specified area) function recognizes the no movement area in a video automatically and lowering the resolution of it to reduce the data size.

With the latest bit rate reducing technology, **GOP control**, **Auto VIQS**, **3D-MNR** (Multi process Noise Reduction) and **FDF** (Frequency Divided Filter), the network bandwidth and the disk space of recorder can be saved.

- Progressive scan ensures clear images with less motion blur and no tearing even when the subject is moving.
- Light control modes : ELC (maximum exposure time) : The lightning control will be automatically
- The lightning control will be automatically performed by adjusting shutter speed in the range of ELC.
- 2x, 4x digital zoom controlled by browser
- VMD (Video Motion Detection) with 4 programmable detection areas, 15 steps sensitivity level and 10 steps detection size
- Privacy Zone can mask up to 8 private areas, such as house windows and entrances/exits.
- Camera title display : Up to 20 alphanumeric characters on the browser
- Alarm sources including VMD and Panasonic alarm command can trigger actions such as FTP image transfer, E-mail notification, Indication on browser, and Panasonic alarm protocol output.

- JPEG Image compression ratio can be changed by alarm so that higher quality image can be provided.
- Prioritized stream control : One of the video streams can be prioritized when multiple recorders or client PCs are accessing the camera so that the recorder or the client PC can maintain the frame rate.
- SDXC/SDHC/SD Memory card slot for manual recording, alarm recording and backup upon network failure
- Face detection function detects the position of human face and the information is sent by XML or video stream. (Optional)
- Can be added new intelligent extension software (Optional) in addition to built-in VMD (Video Motion Detection), alarm function.
- Fog compensation function equipped as standard.
- HLC (High Light Compensation) technology reduces strong light sources such as vehicle headlights to prevent camera being blinded.
- H.264 max. bit rate/client and Total bit rate control allows flexible network traffic management.

Frame rate priority mode controls bit rate and compression ratio to provide the specified frame rate.

- Internet mode : H.264 images can be transmitted over HTTP protocol.
- Multi-language : English / Italian / French / German / Spanish /
 Portuguese / Russian / Chinese / Japanese
- IPv4/IPv6 protocol supported
- Supports SSL, DDNS (viewnetcam, RFC2136)
- ONVIF compliant model
- Low profile design for discrete installation
- Wide coverage WV-SFN130 [16 : 9 mode] Horizontal : 108 ° Vertical : 60 °
- WV-SFN110 [16 : 9 mode] Horizontal : 100 $^\circ\,$ Vertical : 55 $^\circ\,$

Optional Accessory

Smoke Dome Cover



Specifications

Camera	Image Sen		Approx. 1/3 type MOS image sensor
	Scanning N		Progressive
		WV-SFN130	5.28 mm (H) x 2.97 mm (V)
	Area		{7/32 inches (H) x 1/8 inches (V)}
		WW-SFN110	4.86 mm (H) x 3.65 mm (V)
	Minimum	WV-SFN130	{3/16 inches (H) x 5/32 inches (V)} Color: 0.1 lx (F2.3, Maximum shutter : Off (1/30s), AGC : High)
	Illumination	WV-SFN130	0.007 lx (F2.3, Maximum shutter : Max. 16/30s, AGC : High)
			BW: 0.08 lx (F2.3, Maximum shutter : Off (1/30s), AGC : High)
			0.005 lx (F2.3, Maximum shutter : Max. 16/30s, AGC : High) *
		WV-SFN110	Color: 0.04 lx (F2.3, Maximum shutter : Off (1/30s), AGC : High)
			0.003 lx (F2.3, Maximum shutter : Max. 16/30s, AGC : High)
			BW: 0.03 lx (F2.3, Maximum shutter : Off (1/30s), AGC : High)
			0.002 lx (F2.3, Maximum shutter : Max. 16/30s, AGC : High)
	White Balance		AWC (2,000 - 10,000 K), ATW1 (2,700 - 6,000 K), ATW2 (2,000 - 6,000
	Light Control Mode		ELC / Indoor scene 50 Hz / Indoor scene 60 Hz
	Super Dyn		On (High) / On (Normal) / Off
	Dynamic range		122 dB typ. (Super Dynamic : On)
	Face Super Dynamic		On/ Off (only when Super Dynamic : On)
	Adaptive Black Stretch Back light compensation (BLC)		On / Off (only when Super Dynamic : Off)
			On/ Off (only when Super Dynamic : Off)
	Fog compensation		On / Off (only when Super Dynamic/ Adaptive black stretch: Off)
	High light compensation (HLC) AGC		On / Off (only when Super Dynamic / Back light compensation (BLC): Of
	Maximum shutter		On (High) / On (Mid) / On (Low) / Off max. 1/10,000 s, max. 1/4,000 s, max. 1/2,000 s, max. 1/1,000 s,
		n snutter	max. 1/10,000 s, max. 1/4,000 s, max. 1/2,000 s, max. 1/1,000 s, max. 1/500 s, max. 1/250 s, max. 1/120 s, max. 1/100 s, max. 2/120 s, max. 2/100 s, max. 3/120 s, max. 3/100 s, max. 1/30 s, max. 2/30 s, max. 4/30 s, max. 6/30 s, max. 10/30 s, max. 16/30 s
	Day/Night (Electrical)		Off / Auto
	Digital Noise Reduction		High / Low
	Video Motion Detection		On / Off, 4 areas available
	Privacy Zo	ne	On / Off (up to 8 zones available)
	VIQS		On / Off (up to 8 zones available)
	Camera Title (OSD)		Up to 20 characters (alphanumeric characters, marks), On / Of
Lens	Focal Leng		2.8 mm {1/8 inches}
		ctronic) zoom	
	Zoom ratio		x1
			WV-SFN130 : 3x Extra zoom (2.0 mega pixel [16 : 9] mode)
			WV-SFN110 : 2x Extra zoom [16 : 9 mode] Horizontal : 108 ° Vertical : 60 °
	Angular		The stridge house house the ventical of
	Angular Field of View	WV-SFN130	[4 : 2 model Herizentel : 90 ° Vertical : 66 °
	Angular Field of View		[4 : 3 mode] Horizontal : 89 ° Vertical : 66 °
	-	WV-SFN130 WV-SFN110	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 °
	Field of View Maximum a	WV-SFN110 aperture ratio	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3
	Field of View Maximum a Focus Dist	WV-SFN110 aperture ratio	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞
Adjusting	Field of View Maximum a Focus Dist	WV-SFN110 aperture ratio	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m -∞ Installing on a ceiling
Adjusting	Field of View Maximum a Focus Dist	WV-SFN110 aperture ratio	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m -∞ Installing on a ceiling Horizontal : -20 ° to +20 °
Adjusting	Field of View Maximum a Focus Dist	WV-SFN110 aperture ratio	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a ceiling Horizontal : -20 ° to +20 ° Vertical : -20 ° to 0 ° (right under) to +90 ° (right beside)
Adjusting	Field of View Maximum a Focus Dist	WV-SFN110 aperture ratio	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a ceiling Horizontal : -20 ° to 420 ° Vertical : -20 ° to 9 ° (right under) to +90 ° (right beside) Installing on a wall
Adjusting	Field of View Maximum a Focus Dist	WV-SFN110 aperture ratio	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a ceiling Horizontal : -20 ° to +20 ° Vertical : -20 ° to 0 ° (right under) to +90 ° (right beside) Installing on a wall Horizontal : +90° to -90°
	Field of View Maximum a Focus Dist Angle	WV-SFN110 aperture ratio ance	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a ceiling Horizontal : -20 ° to 420 ° Vertical : -20 ° to 0 ° (right under) to +90 ° (right beside) Installing on a wall Horizontal : +90° to -90° Vertical : -20 ° to 0 ° (right beside) to +90 ° (right under)
Browser	Field of View Maximum a Focus Dist Angle	WV-SFN110 aperture ratio ance	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a ceiling Horizontal : -20 ° to +20 ° Vertical : -20 ° to 0 ° (right under) to +90 ° (right beside) Installing on a wall Horizontal : +90° to -90° Vertical : -20 ° to 0 ° (right beside) to +90 ° (right under) Brightness
Browser	Field of View Maximum a Focus Dist Angle	WV-SFN110 aperture ratio ance	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a ceiling Horizontal : -20 ° to +20 ° Vertical : -20 ° to 0 ° (right under) to +90 ° (right beside) Installing on a wall Horizontal : +90° to -90° Vertical : -20 ° to 0 ° (right beside) to +90 ° (right under) Brightness Spot, Quad : Image from 16 cameras can be displayed in
Adjusting Browser GUI	Field of View Maximum a Focus Dist Angle	WV-SFN110 aperture ratio ance	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a ceiling Horizontal : -20 ° to +20 ° Vertical : -20 ° to 0 ° (right under) to +90 ° (right beside) Installing on a wall Horizontal : +90° to -90° Vertical : -20 ° to 0 ° (right beside) to +90 ° (right under) Brightness Spot, Quad : Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only).
Browser	Field of View Maximum a Focus Dist Angle Camera Co Display Mo	WV-SFN110 aperture ratio ance	$ \begin{array}{l} [16:9 mode] \mbox{ Horizontal : } 100 \ ^\circ \mbox{ Vertical : } 55 \ ^\circ \\ [4:3 mode] \mbox{ Horizontal : } 100 \ ^\circ \mbox{ Vertical : } 73 \ ^\circ \\ 1:2.3 \ & \ & \ & \ & \ & \ & \ & \ & \ & \ $
Browser	Field of View Maximum a Focus Dist Angle Camera Co Display Mo Camera Tit	WV-SFN110 ance ontrol ode	$ \begin{array}{l} [16:9 mode] \mbox{ Horizontal}: 100 ° \mbox{ Vertical}: 55 ° \\ [4:3 mode] \mbox{ Horizontal}: 100 ° \mbox{ Vertical}: 73 ° \\ 1:2.3 \\ 0.5 m - \infty \\ 1.5 m - 20 ° to 20 ° \\ 1.5 m - 20 ° to 20 ° \\ 1.5 m - 20 ° to 20 ° \\ 1.5 m - 20 ° to 20 ° \\ 1.5 m - 20 ° to 20 ° \\ 1.5 m - 20 ° to 20 ° \\ 1.5 m - 20 ° to 20 ° \\ 1.5 m - 20 ° to 20 ° \\ 1.5 m - 20 ° to 20 ° \\ 1.5 m - 20 ° \\ $
Browser	Field of View Maximum a Focus Dist Angle Camera Ct Display Mc Camera Til Clock Disp	WV-SFN110 perture ratio ance ontrol ode	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a ceiling Horizontal : -20 ° to +20 ° Vertical : -20 ° to 0 ° (right under) to +90 ° (right beside) Installing on a wall Horizontal : +90° to -90° Vertical : -20 ° to 0 ° (right beside) to +90 ° (right under) Brightness Spot, Quad : Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only). 20 characters camera title available. Up to 20 alphanumeric characters Time : 12H/24H/Off, Date : 5 formats on the browser, Summer time (Manua
Browser	Field of View Maximum a Focus Dist Angle Camera Co Display Mo Camera Tit	WV-SFN110 ance ontrol ode	$ \begin{array}{l} [16:9 mode] \mbox{ Horizontal}: 100 ° \mbox{ Vertical}: 55 ° \\ [4:3 mode] \mbox{ Horizontal}: 100 ° \mbox{ Vertical}: 73 ° \\ 1:2.3 \\ 0.5 m - \infty \\ 1.5 m - 20 ° to 20 ° \\ 1.5 m - 20 ° to 20 ° \\ 1.5 m - 20 ° to 20 ° \\ 1.5 m - 20 ° to 20 ° \\ 1.5 m - 20 ° to 20 ° \\ 1.5 m - 20 ° to 20 ° \\ 1.5 m - 20 ° to 20 ° \\ 1.5 m - 20 ° to 20 ° \\ 1.5 m - 20 ° to 20 ° \\ 1.5 m - 20 ° \\ $
Browser	Field of View Maximum a Focus Dist Angle Camera Co Display Mc Camera Tit Clock Disp One Shot C	WV-SFN110 aperture ratio ance ontrol ode ile capture y	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a ceiling Horizontal : -20 ° to +20 ° Vertical : -20 ° to 0 ° (right under) to +90 ° (right beside) Installing on a wall Horizontal : +90° to -90° Vertical : -20 ° to 0 ° (right beside) to +90 ° (right under) Brightness Spot, Quad : Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only). 20 characters camera title available. Up to 20 alphanumeric characters Time : 12H/24H/Off, Date : 5 formats on the browser, Summer time (Manux A still picture will be displayed on a newly opened window.
Browser	Field of View Maximum a Focus Dist Angle Camera Cd Display Mc Camera Tit Clock Disp One Shot SD Memor	WV-SFN110 ance ontrol ode tle Capture y iload	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a ceiling Horizontal : -20 ° to +20 ° Vertical : -20 ° to 0 ° (right under) to +90 ° (right beside) Installing on a wall Horizontal : +90° to -90° Vertical : -20 ° to 0 ° (right beside) to +90 ° (right under) Brightness Spot, Quad : Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only). 20 characters camera title available. Up to 20 alphanumeric characters Time : 12H/24H/Off, Date : 5 formats on the browser, Summer time (Manux A still picture will be displayed on a newly opened window. Still or motion Images recorded in the SDXC/SDHC/SD memory card can be downloaded. English, Italian, French, German, Spanish, Portuguese,
Browser	Field of View Maximum a Focus Dist Angle Camera Ct Display Mc Camera Tit Clock Disy One Shot (SD Memor Data Dowr GUU/Setup Menu Lang	WV-SFN110 aperture ratio ance ontrol de ile lay Capture y iload	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a ceiling Horizontal : -20 ° to +20 ° Vertical : -20 ° to 0 ° (right under) to +90 ° (right beside) Installing on a wall Horizontal : +90° to -90° Vertical : -20 ° to 0 ° (right beside) to +90 ° (right under) Brightness Spot, Quad : Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only). 20 characters camera title available. Up to 20 alphanumeric characters Time : 12H/24H/0ft, Date : 5 formats on the browser, Summer time (Manuz A still picture will be displayed on a newly opened window. Still or motion Images recorded in the SDXC/SDHC/SD memory card can be downloaded. English, Halian, French, German, Spanish, Portuguese, Chinese, Russian, Japanese
Browser	Field of View Maximum a Focus Dist Angle Camera Ct Display Mc Camera Til Clock Disp One Shot (SD Memor Data Dowr GUI/Setup	WV-SFN110 aperture ratio ance ontrol de ile lay Capture y iload	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a ceiling Horizontal : -20 ° to +20 ° Vertical : -20 ° to 0 ° (right under) to +90 ° (right beside) Installing on a wall Horizontal : -20 ° to -90° Vertical : -20 ° to 0 ° (right beside) to +90 ° (right under) Brightness Spot, Quad : Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only). 20 characters camera tilte available. Up to 20 alphanumeric characters Time: 12H/24H/0ft, Date : 5 formats on the browser, Summer time (Manua A still picture will be displayed on a newly opened window. Still or motion Images recorded in the SDXC/SDHC/SD memory card can be downloaded. English, Italian, French, German, Spanish, Portuguese, Chinese, Russian, Japanese Up to 100 (Internal), Up to 4,000 (SDXC/SDHC/SD memory
Browser	Field of View Maximum a Focus Dist Angle Camera Cit Display Mc Camera Til Clock Disp One Shot (SD Memor Data Dowr GUI/Setup Menu Lang System Lo	WV-SFN110 perture ratio ance ontrol ode tle Lay Capture y Iload guage g	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a ceiling Horizontal : -20 ° to +20 ° Vertical : -20 ° to 0 ° (right under) to +90 ° (right beside) Installing on a wall Horizontal : +90 ° to -90° Vertical : -20 ° to 0 ° (right beside) to +90 ° (right under) Brightness Spot, Quad : Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only). 20 characters camera title available. Up to 20 alphanumeric characters Time : 12H/24H/Off, Date : 5 formats on the browser, Summer time (Manua A still picture will be displayed on a newly opened window. Still or motion Images recorded in the SDXC/SDHC/SD memory card can be downloaded. English, Italian, French, German, Spanish, Portuguese, Chinese, Russian, Japanese Up to 100 (Internal), Up to 4,000 (SDXC/SDHC/SD memory when the recording format is set to JPEG.) error logs
Browser	Field of View Maximum a Focus Dist Angle Camera Ct Display Mc Camera Tit Clock Disy One Shot (SD Memor Data Dowr GUU/Setup Menu Lang	WV-SFN110 perture ratio ance ontrol ode tle Lay Capture y Iload guage g	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a ceiling Horizontal : -20 ° to +20 ° Vertical : -20 ° to 0 ° (right under) to +90 ° (right beside) Installing on a wall Horizontal : +90° to -90° Vertical : -20 ° to 0 ° (right beside) to +90 ° (right under) Brightness Spot, Quad : Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only). 20 characters camera title available. Up to 20 alphanumeric characters Time : 12H/24H/Off, Date : 5 formats on the browser, Summer time (Manuz A still picture will be displayed on a newly opened window. Still or motion Images recorded in the SDXC/SDHC/SD memory card can be downloaded. English, Italian, French, German, Spanish, Portuguese, Chinese, Russian, Japanese Up to 100 (Internal), Up to 4,000 (SDXC/SDHC/SD memory When the recording format is set to JPEG.) error logs Microsoft® Windows® 10
Browser	Field of View Maximum a Focus Dist Angle Camera Cit Display Mc Camera Til Clock Disp One Shot (SD Memor Data Dowr GUI/Setup Menu Lang System Lo	WV-SFN110 perture ratio ance ontrol ode tle Lay Capture y Iload guage g	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a ceiling Horizontal : -20 ° to 420 ° Vertical : -20 ° to 0 ° (right under) to +90 ° (right beside) Installing on a wall Horizontal : -90 ° to -90° Vertical : -20 ° to 0 ° (right beside) to +90 ° (right under) Brightness Spot, Quad : Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only). 20 characters camera title available. Up to 20 alphanumeric characters Time: 12H/24H/Off, Date : 5 formats on the browser, Summer time (Manua A still picture will be displayed on a newly opened window. Still or motion Images recorded in the SDXC/SDHC/SD memory card can be downloaded. English, Italian, French, German, Spanish, Portuguese, Chinese, Russian, Japanese Up to 100 (Internal), Up to 4,000 (SDXC/SDHC/SD memory when the recording format is set to JPEG.) error logs Microsoft® Windows® 10
Browser	Field of View Maximum a Focus Dist Angle Camera Cit Display Mc Camera Til Clock Disp One Shot (SD Memor Data Dowr GUI/Setup Menu Lang System Lo	WV-SFN110 perture ratio ance ontrol ode tle Lay Capture y Iload guage g	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a ceiling Horizontal : -20 ° to +20 ° Vertical : -20 ° to 0 ° (right under) to +90 ° (right beside) Installing on a wall Horizontal : +00 ° to -90° Vertical : -20 ° to 0 ° (right beside) to +90 ° (right under) Brightness Spot, Quad : Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only). 20 characters camera title available. Up to 20 alphanumeric characters Time: 12H/24H/0ff, Date : 5 formats on the browser, Summer time (Manua A still picture will be displayed on a newly opened window. Still or motion Images recorded in the SDXC/SDHC/SD memory card can be downloaded. English, Italian, French, German, Spanish, Portuguese, Chinese, Russian, Japanese Up to 100 (Internal), Up to 4,000 (SDXC/SDHC/SD memory when the recording format is set to JPEG.) error logs Microsoft® Windows® 10 Microsoft® Windows® 8.1
Browser	Field of View Maximum a Focus Dist Angle Camera Ct Display Mc Camera Tif Clock Disp One Shot (SD Memor Data Dowr GUI/Setup Menu Lang System Lo Supported	WV-SFN110 apperture ratio ance ontrol ode tile lay Capture y load Gage g OS *2 *3	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a ceiling Horizontal : -20 ° to +20 ° Vertical : -20 ° to 0 ° (right under) to +90 ° (right beside) Installing on a wall Horizontal : +90° to -90° Vertical : -20 ° to 0 ° (right beside) to +90 ° (right under) Brightness Spot, Quad : Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only). 20 characters camera title available. Up to 20 alphanumeric characters Time : 12H/24H/Off, Date : 5 formats on the browser, Summer time (Manu A still picture will be displayed on a newly opened window. Still or motion Images recorded in the SDXC/SDHC/SD memory card can be downloaded. English, Italian, French, German, Spanish, Portuguese, Chinese, Russian, Japanese Up to 100 (Internal), Up to 4,000 (SDXC/SDHC/SD memory when the recording format is set to JPEG.) error logs Microsoft® Windows® 10 Microsoft® Windows® 8 Microsoft® Windows® 7
Browser	Field of View Maximum a Focus Dist Angle Camera Cit Display Mc Camera Til Clock Disp One Shot (SD Memor Data Dowr GUI/Setup Menu Lang System Lo	WV-SFN110 apperture ratio ance ontrol ode tile lay Capture y load Gage g OS *2 *3	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a ceiling Horizontal : -20 ° to +20 ° Vertical : -20 ° to 0 ° (right under) to +90 ° (right beside) Installing on a wall Horizontal : +90° to -90° Vertical : -20 ° to 0 ° (right beside) to +90 ° (right under) Brightness Spot, Quad : Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only). 20 characters camera title available. Up to 20 alphanumeric characters Time : 12H/24H/0ft, Date : 5 formats on the browser, Summer time (Manu A still picture will be displayed on a newly opened window. Still or motion Images recorded in the SDXC/SDHC/SD memory card can be downloaded. English, Italian, French, German, Spanish, Portuguese, Chinese, Russian, Japanese Up to 100 (Internal), Up to 4,000 (SDXC/SDHC/SD memory when the recording format is set to JPEG.) error logs Microsoft® Windows® 10 Microsoft® Windows® 11 Microsoft® Windows® 7 Windows® Internet Explorer® 11 (32 bit)
Browser	Field of View Maximum a Focus Dist Angle Camera Ct Display Mc Camera Tif Clock Disp One Shot (SD Memor Data Dowr GUI/Setup Menu Lang System Lo Supported	WV-SFN110 apperture ratio ance ontrol ode tile lay Capture y load Gage g OS *2 *3	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a ceiling Horizontal : -20 ° to +20 ° Vertical : -20 ° to 0 ° (right under) to +90 ° (right beside) Installing on a wall Horizontal : -90 ° to -90° Vertical : -20 ° to 0 ° (right beside) to +90 ° (right under) Brightness Spot, Quad : Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only). 20 characters camera title available. Up to 20 alphanumeric characters Time: 12H/24H/Off, Date : 5 formats on the browser, Summer time (Manua A still picture will be displayed on a newly opened window. Still or motion Images recorded in the SDXC/SDHC/SD memory card can be downloaded. English, Italian, French, German, Spanish, Portuguese, Chinese, Russian, Japanese Up to 100 (Internal), Up to 4,000 (SDXC/SDHC/SD memory when the recording format is set to JPEG.) error logs Microsoft® Windows® 10 Microsoft® Windows® 7 Windows® Intermet Explorer® 11 (32 bit) Windows® Intermet Explorer® 10 (32 bit)
Browser	Field of View Maximum a Focus Dist Angle Camera Ct Display Mc Camera Tif Clock Disp One Shot (SD Memor Data Dowr GUI/Setup Menu Lang System Lo Supported	WV-SFN110 apperture ratio ance ontrol ode tile lay Capture y load Gage g OS *2 *3	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a ceiling Horizontal : -20 ° to +20 ° Vertical : -20 ° to 0 ° (right under) to +90 ° (right beside) Installing on a wall Horizontal : +0° to -90° Vertical : -20 ° to 0 ° (right beside) to +90 ° (right under) Brightness Spot, Quad : Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only). 20 characters camera title available. Up to 20 alphanumeric characters Time : 12H/24H/0ff, Date : 5 formats on the browser, Summer time (Manua A still picture will be displayed on a newly opened window. Still or motion Images recorded in the SDXC/SDHC/SD memory card can be downloaded. English, Italian, French, German, Spanish, Portuguese, Chinese, Russian, Japanese Up to 100 (Internal), Up to 4,000 (SDXC/SDHC/SD memory when the recording format is set to JPEG.) error logs Microsoft® Windows® 10 Microsoft® Windows® 7 Windows® Intermet Explorer® 11 (32 bit) Windows® Intermet Explorer® 12 (32 bit) Windows® Intermet Explorer® 9 (32 bit)
Browser	Field of View Maximum a Focus Dist Angle Camera Ct Display Mc Camera Tif Clock Disp One Shot (SD Memor Data Dowr GUI/Setup Menu Lang System Lo Supported	WV-SFN110 apperture ratio ance ontrol ode tile lay Capture y load Gage g OS *2 *3	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a ceiling Horizontal : -20 ° to +20 ° Vertical : -20 ° to 20 ° (right under) to +90 ° (right beside) Installing on a wall Horizontal : +90° to -90° Vertical : -20 ° to 0 ° (right beside) to +90 ° (right under) Brightness Spot, Quad : Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only). 20 characters camera title available. Up to 20 alphanumeric characters Time : 12H/24H/Off, Date : 5 formats on the browser, Summer time (Manu A still picture will be displayed on a newly opened window. Still or motion Images recorded in the SDXC/SDHC/SD memory card can be downloaded. English, Italian, French, German, Spanish, Portuguese, Chinese, Russian, Japanese Up to 100 (Internal), Up to 4,000 (SDXC/SDHC/SD memory when the recording format is set to JPEG.) error logs Microsoft® Windows® 10 Microsoft® Windows® 8 Microsoft® Windows® 7 Windows® Intermet Explorer® 11 (32 bit) Windows® Intermet Explorer® 10 (32 bit) Windows® Intermet Explorer® 9 (32 bit) Windows® Intermet Explorer® 8 (32 bit)<
Browser	Field of View Maximum a Focus Dist Angle Camera Ct Display Mc Camera Tif Clock Disp One Shot (SD Memor Data Dowr GUI/Setup Menu Lang System Lo Supported	WV-SFN110 apperture ratio ance ontrol ode tile lay Capture y load Gage g OS *2 *3	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a ceiling Horizontal : -20 ° to +20 ° Vertical : -20 ° to 0 ° (right under) to +90 ° (right beside) Installing on a wall Horizontal : +0° to -90° Vertical : -20 ° to 0 ° (right beside) to +90 ° (right under) Brightness Spot, Quad : Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only). 20 characters camera title available. Up to 20 alphanumeric characters Time : 12H/24H/0ff, Date : 5 formats on the browser, Summer time (Manua A still picture will be displayed on a newly opened window. Still or motion Images recorded in the SDXC/SDHC/SD memory card can be downloaded. English, Italian, French, German, Spanish, Portuguese, Chinese, Russian, Japanese Up to 100 (Internal), Up to 4,000 (SDXC/SDHC/SD memory when the recording format is set to JPEG.) error logs Microsoft® Windows® 10 Microsoft® Windows® 7 Windows® Intermet Explorer® 11 (32 bit) Windows® Intermet Explorer® 12 (32 bit) Windows® Intermet Explorer® 9 (32 bit)
Browser GUI	Field of View Maximum a Focus Dist Angle Camera Ct Display Mc Camera Tif Clock Disp One Shot (SD Memor Data Dowr GUI/Setup Menu Lang System Lo Supported	WV-SFN110 aperture ratio ance ontrol ode lie lay capture y load g OS '2 '3 Browser	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a ceiling Horizontal : -20 ° to 420 ° Vertical : -20 ° to 0 ° (right under) to +90 ° (right beside) Installing on a wall Horizontal : -90 ° to -90° Vertical : -20 ° to 0 ° (right beside) to +90 ° (right under) Brightness Spot, Quad : Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only). 20 characters camera title available. Up to 20 alphanumeric characters Time: 12H/24H/Off, Date : 5 formats on the browser, Summer time (Manue A still picture will be displayed on a newly opened window. Still or motion Images recorded in the SDXC/SDHC/SD memory card can be downloaded. English, Italian, French, German, Spanish, Portuguese, Chinese, Russian, Japanese Up to 100 (Internal), Up to 4,000 (SDXC/SDHC/SD memory when the recording format is set to JPEG.) error logs Microsoft® Windows® 8.1 Microsoft® Windows® 7 Windows® Internet Explorer® 10 (32 bit) Windows® Internet Explorer® 8 (32 bit) Stafari, Google Chromes, Mozilla Firefox*
Browser GUI	Field of View Maximum a Focus Dist Angle Camera CC Display McC Camera Tit Clock Disp One Shot C SD Memor Data Dowr GU/Setup Menu Lang System Lo Supported	WV-SFN110 aperture ratio ance ontrol ode lie lay capture y load g OS '2 '3 Browser	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a ceiling Horizontal : -20 ° to +20 ° Vertical : -20 ° to 0 ° (right under) to +90 ° (right beside) Installing on a wall Horizontal : +90 ° to -90° Vertical : -20 ° to 0 ° (right beside) to +90 ° (right under) Brightness Spot, Quad : Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only). 20 characters camera title available. Up to 20 alphanumeric characters Time : 12H/24H/Off, Date : 5 formats on the browser, Summer time (Manual A still picture will be displayed on a newly opened window. Still or motion Images recorded in the SDXC/SDHC/SD memory card can be downloaded. Enginsh, Italian, French, German, Spanish, Portuguese, Chinese, Russian, Japanese Up to 100 (Internal), Up to 4,000 (SDXC/SDHC/SD memory when the recording format is set to JPEG.) error logs Microsoft® Windows® 10 Microsoft® Windows® 7 Windows® Intermet Explorer® 11 (32 bit) Windows® Intermet Explorer® 11 (32 bit) Windows® Intermet Explorer® 12 (32 bit) Windows® Intermet Explorer® 13 (32 bit) Windows® Intermet Explorer® 14 (32 bit) Windows® Intermet Explorer® 8 (32 bit) Safar, Google Chromer, Mozilla Firefox* * with limitations in the part of setting screen 10Base-T / 100Base-TX, RJ45 connector (fermale)
Browser GUI	Field of View Maximum a Focus Dist Angle Camera Cd Display Mc Camera Til Clock Disp One Shot G SD Memor Bata Dowr GU/Setup Menu Lang System Lo Supported Supported	WV-SFN110 apperture ratio ance ontrol ade tle lay Capture y load g OS '2 '3 Browser WV-SFN130	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a celling Horizontal : -20 ° to 420 ° Vertical : -20 ° to 0 ° (right under) to +90 ° (right beside) Installing on a wall Horizontal : -90 ° to -90° Vertical : -20 ° to 0 ° (right beside) to +90 ° (right under) Brightness Spot, Quad : Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only). 20 characters camera title available. Up to 20 alphanumeric characters Time: 12H/24H/Off, Date : 5 formats on the browser, Summer time (Manue A still picture will be displayed on a newly opened window. Still or motion Images recorded in the SDXC/SDHC/SD memory card can be downloaded. English, Italian, French, German, Spanish, Portuguese, Chinese, Russian, Japanese Up to 100 (Internal), Up to 4,000 (SDXC/SDHC/SD memory when the recording format is set to JPEG.) error logs Microsoft® Windows® 10 Microsoft® Windows® 8.1 Microsoft® Windows® 8 Microsoft® Windows® 7 Windows® Internet Explorer® 10 (32 bit) Windows® Internet Explorer® 9 (32 bit) Windows® Internet Explorer® 9 (32 bit) Windows® Internet Explorer® 8 (32 bit) Safari, Google Chrome*, Mozilla Firefox* * with limitations in the part of setting screen 10Base-T / 100Base-TX, RJ45 connector (female) 2 mega pixel [16 : 9] 1,920 × 1,080 / 1,280 × 720 / 640 × 360 / 320 × 180 / 160 × 9
Browser GUI	Field of View Maximum a Focus Dist Angle Camera Ct Display Mc Camera Tit Clock Disy Cone Shot (SD Memor Data Dowr GUl/Setup Menu Lang System Lo Supported Supported Network IF Image	WV-SFN110 aperture ratio ance ontrol ode le lay Capture y load g OS *2 *3 Browser WV-SFN130	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a ceiling Horizontal : -20 ° to +20 ° Vertical : -20 ° to +20 ° Vertical : -20 ° to 0 ° (right under) to +90 ° (right beside) Installing on a wall Horizontal : +00 ° to -90° Vertical : -20 ° to 0 ° (right beside) to +90 ° (right under) Brightness Spot, Quad : Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only). 20 characters camera title available. Up to 20 alphanumeric characters Time: 12H/24H/0ft, Date : 5 formats on the browser, Summer time (Manu A still picture will be displayed on a newly opened window. Still or motion Images recorded in the SDXC/SDHC/SD memory card can be downloaded. English, Italian, French, German, Spanish, Portuguese, Chinese, Russian, Japanese Up to 100 (Internal), Up to 4,000 (SDXC/SDHC/SD memory when the recording format is set to JPEG.) error logs Microsoft® Windows® 10 Microsoft® Windows® 8.1 Microsoft® Windows® 8 Microsoft® Windows® 7 Windows® Internet Explorer® 10 (32 bit) Windows® Internet Explorer® 9 (32 bit) Windows® Internet Explorer® 9 (32 bit) Windows® Internet Explorer® 8 (32 bit) Safari*, Google Chrome*, Mozilla Firefox* * with limitations in the part of setting screen 10Base-T / 100Base-TX, RJ4S connector (female) *2 mega pixel [16 : 9] 1,920 x 1,080' mode is only available for H.264(1), H.264(2) * "1,920 x 1,080' mode is only available for H.264(1), H.264(2)
Browser GUI	Field of View Maximum a Focus Dist Angle Camera Cc Display Mc Camera Tit Clock Disp Clock Disp Clock Disp Clock Disp Cone Shot I SD Memor Data Dowr GUI/Setup Menu Lang System Lo Supported Supported Network IF Image Resolution	WV-SFN110 aperture ratio ance ontrol ode le lay Capture y load g OS *2 *3 Browser WV-SFN130	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a ceiling Horizontal : -20 ° to +20 ° Vertical : -20 ° to 0 ° (right under) to +90 ° (right beside) Installing on a wall Horizontal : +90 ° to -90° Vertical : -20 ° to 0 ° (right beside) to +90 ° (right under) Brightness Spot, Quad : Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only). 20 characters camera title available. Up to 20 alphanumeric characters Time : 12H/24H/Off, Date : 5 formats on the browser, Summer time (Manuá A still picture will be displayed on a newly opened window. Still or motion Images recorded in the SDXC/SDHC/SD memory card can be downloaded. English, Italian, French, German, Spanish, Portuguese, Chinese, Russian, Japanese Up to 100 (Internal), Up to 4,000 (SDXC/SDHC/SD memory when the recording format is set to JPEG.) error logs Microsoft® Windows® 10 Microsoft® Windows® 7 Windows® Internet Explorer® 11 (32 bit) Windows® Internet Explorer® 11 (32 bit) Windows® Internet Explorer® 8 (32 bit) Windows® Internet Explorer® 10 (32 bit) Windows® Internet Explorer® 8 (32 bit) Windows® Internet Explorer® 10 (32 bit) Windows® Internet Explorer® 10 (32 bit) Windows® Internet Explorer® 8 (32 bit) Windows® Internet Explorer® 10 (32 bit) Windows® Internet Explorer® 10 (32 bit) Windows® Internet Explorer® 8 (32 bit) Windows® Internet Explorer® 10 (32 bit) Windows® Internet Explorer® 8 (32 bit) Windows® Internet Explorer® 10 (32 bit) Windows® Internet Explorer® 8 (32 bit) Windows® Internet Explorer®
Browser	Field of View Maximum a Focus Dist Angle Camera Cc Display Mc Camera Tit Clock Disp Clock Disp Clock Disp Clock Disp Cone Shot I SD Memor Data Dowr GUI/Setup Menu Lang System Lo Supported Supported Network IF Image Resolution	WV-SFN110 aperture ratio ance ontrol ode le lay Capture y load g OS *2 *3 Browser WV-SFN130	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a ceiling Horizontal : -20 ° to +20 ° Vertical : -20 ° to +20 ° Vertical : -20 ° to 0 ° (right under) to +90 ° (right beside) Installing on a wall Horizontal : +90° to -90° Vertical : -20 ° to 0 ° (right beside) to +90 ° (right under) Brightness Spot, Quad : Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only). 20 characters camera title available. Up to 20 alphanumeric characters Time : 12H/24H/Off, Date : 5 formats on the browser, Summer time (Manu A still picture will be displayed on a newly opened window. Still or motion Images recorded in the SDXC/SDHC/SD memory card can be downloaded. English, Italian, French, German, Spanish, Portuguese, Chinese, Russian, Japanese Up to 100 (Internal), Up to 4,000 (SDXC/SDHC/SD memory when the recording format is set to JPEG.) error logs Microsoft® Windows® 10 Microsoft® Windows® 11 Microsoft® Windows® 7 Windows® Internet Explorer® 10 (32 bit) Windows® Internet Explorer® 9 (32 bit) Windows® Internet Explorer® 9 (32 bit) Windows® Internet Explorer® 9 (32 bit) Windows® Internet Explorer® 8 (32 bit) Safar', Google Chrome*, Mozilla Firefox* * with limitations in the part of setting screen 10Base-T / 100Base-TX, RJ45 connector (female) * 2 mega pixel [16 : 9] 1,920 x 1,080 * 020 × 720 / 640 x 360 / 320 x 180 / 160 x 9 * "1,920 x 1,080 * mode is only available for H.264(1), H.264(2) * "1,920 x 1,080 * 960 / 800 × 600 / VGA / 400 x 300 /
Browser GUI	Field of View Maximum a Focus Dist Angle Camera Cc Display Mc Camera Tit Clock Disp Clock Disp Clock Disp Clock Disp Cone Shot I SD Memor Data Dowr GUI/Setup Menu Lang System Lo Supported Supported Network IF Image Resolution	WV-SFN110 aperture ratio ance ontrol ode le lay Capture y load g OS *2 *3 Browser WV-SFN130	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a ceiling Horizontal : -20 ° to 420 ° Vertical : -20 ° to 2° (right under) to +90 ° (right beside) Installing on a wall Horizontal : +00° to -90° Vertical : -20 ° to 0 ° (right beside) to +90 ° (right under) Brightness Spot, Quad : Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only). 20 characters camera tille available. Up to 20 alphanumeric characters Time : 12H/24H/Off, Date : 5 formats on the browser, Summer time (Manuz A still picture will be displayed on a newly opened window. Still or motion Images recorded in the SDXC/SDHC/SD memory card can be downloaded. English, Italian, French, German, Spanish, Portuguese, Chinese, Russian, Japanese Up to 100 (Internal), Up to 4,000 (SDXC/SDHC/SD memory when the recording format is set to JPEG.) error logs Microsoft® Windows® 10 Microsoft® Windows® 11 Microsoft® Windows® 8 Microsoft® Windows® 7 Windows® Internet Explorer® 11 (32 bit) Windows® Internet Explorer® 9 (32 bit) Stafari, Google Chrome*, Mozilla Firefox* * with limitations in the part of setting screen 10Base-T / 100Base-TX, RJ45 connector (female) • 2 mega pixel [16 : 9] 1,920 x 1,080 / 1,280 x 720 / 640 x 360 / 320 x 180 / 160 x 9 * "1,920 x 1,080 / 1,280 x 720 / 640 x 360 / 320 x 180 / 160 x 9 * "1,920 x 1,080 / 1,280 x 720 / 640 x 360 / 320 x 180 / 160 x 9 * "1,920 x 1,080 / 1,280 x 960 / 800 x 600 / VGA / 400 x 300 / QVGA / 160 x 120
Browser GUI	Field of View Maximum a Focus Dist Angle Camera Cc Display Mc Camera Tit Clock Disp Clock Disp Clock Disp Clock Disp Cone Shot I SD Memor Data Dowr GUI/Setup Menu Lang System Lo Supported Supported Network IF Image Resolution	WV-SFN110 aperture ratio ance ontrol ode le lay Capture y load g OS *2 *3 Browser WV-SFN130	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a ceiling Horizontal : -20 ° to +20 ° Vertical : -20 ° to 2° (right under) to +90 ° (right beside) Installing on a wall Horizontal : -90 ° to -90° Vertical : -20 ° to 0 ° (right beside) to +90 ° (right under) Brightness Spot, Quad : Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only). 20 characters camera title available. Up to 20 alphanumeric characters Time : 12H/24H/0f, Date : 5 formats on the browser, Summer time (Manue A still picture will be displayed on a newly opened window. Still or motion Images recorded in the SDXC/SDHC/SD memory card can be downloaded. English, Italian, French, German, Spanish, Portuguese, Chinese, Russian, Japanese Up to 100 (Internal), Up to 4,000 (SDXC/SDHC/SD memory when the recording format is set to JPEG.) error logs Microsoft® Windows® 1. Microsoft® Windows® 8. Microsoft® Windows® 8 Microsoft® Undows® 8 Microsoft® Internet Explorer® 11 (32 bit) Windows® Internet Explorer® 10 (32 bit) Windows® Internet Explorer® 8 (32 bit) Safari, Google Chrome*, Mozilla Firefox* * with limitations in the part of setting screen 10Base-T / 100Base-TX, RJ45 connector (female) *2 mega pixel [16 : 9] 1,920 × 1,080 / 1,280 × 720 / 640 × 360 / 320 × 180 / 160 × 9 * "1,920 × 1,080 / 1,280 × 900 / 800 × 600 / VGA / 400 × 300 / QVGA / 160 × 120 * "1,600 × 1,200" mode is only available for H.264(1), H.264(2) * Head available for H.264(1), H.264(2) * "1,920 × 1,080 / 1,280 × 900 / 800 × 600 / VGA / 400 × 300 / Window 1,280 × 1,280 × 780 / 640 × 600 / VGA / 400 × 300 / Window 1,280 × 1,280 × 900 / 800 × 600 / VGA / 400 × 300 / Window 1,280 × 1,280 × 780 /
Browser GUI	Field of View Maximum a Focus Dist Angle Camera Cc Display Mc Camera Tit Clock Disp Clock Disp Clock Disp Clock Disp Cone Shot I SD Memor Data Dowr GUI/Setup Menu Lang System Lo Supported Supported Network IF Image Resolution	WV-SFN110 aperture ratio ance ontrol ode le lay Capture y load g OS *2 *3 Browser WV-SFN130	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a ceiling Horizontal : -20 ° to +20 ° Vertical : -20 ° to 20 ° (right under) to +90 ° (right beside) Installing on a wall Horizontal : +90 ° to -90° Vertical : -20 ° to 0 ° (right beside) to +90 ° (right under) Brightness Spot, Quad : Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only). 20 characters camera title available. Up to 20 alphanumeric characters Time : 12H/24H/Off, Date : 5 formats on the browser, Summer time (Manu A still picture will be displayed on a newly opened window. Still or motion Images recorded in the SDXC/SDHC/SD memory card can be downloaded. English, Italian, French, German, Spanish, Portuguese, Chinese, Russian, Japanese Up to 100 (Internal), Up to 4,000 (SDXC/SDHC/SD memory when the recording format is set to JPEG.) error logs Microsoft® Windows® 10 Microsoft® Windows® 8 Microsoft® Windows® 8 Microsoft® Windows® 7 Windows® Internet Explorer® 11 (32 bit) Windows® Internet Explorer® 10 (32 bit) Windows® Internet Explorer® 8 (32 bit) Windows® Internet Explorer® 10 (32 bit) Windows® Internet Explorer® 8 (32 bit) Windows® Internet Explorer® 10 (32 bit) Windows® Internet Explorer® 10 (32 bit) Windows® Internet Explorer® 8 (32 bit) Windows® Internet Explorer® 8 (32 bit) Windows® Internet Explorer® 10 (32 bit) Windows® Internet Explorer® 8 (32 bit) Windows® Internet Explorer® 10 (32 bit) Windows® Internet Explorer® 10 (32 bit) Windows® Internet Explorer® 8 (32 bit) Windows® Internet Explorer® 10 (32 bit) Windows®
Browser GUI	Field of View Maximum a Focus Dist Angle Camera Cc Display Mc Camera Tit Clock Disp Clock Disp Clock Disp Clock Disp Cone Shot I SD Memor Data Dowr GUI/Setup Menu Lang System Lo Supported Supported Network IF Image Resolution	WV-SFN110 aperture ratio ance ontrol ode le lay Capture y load g OS *2 *3 Browser WV-SFN130	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a ceiling Horizontal : -20 ° to 420 ° Vertical : -20 ° to 10 ° (right under) to +90 ° (right beside) Installing on a wall Horizontal : +0° to -90° Vertical : -20 ° to 0 ° (right beside) to +90 ° (right under) Brightness Spot, Quad : Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only). 20 characters camera title available. Up to 20 alphanumeric characters Time : 12H/24H/Off, Date : 5 formats on the browser, Summer time (Manue A still picture will be displayed on a newly opened window. Still or motion Images recorded in the SDXC/SDHC/SD memory card can be downloaded. English, Italian, French, German, Spanish, Portuguese, Chinese, Russian, Japanese Up to 100 (Internal), Up to 4,000 (SDXC/SDHC/SD memory when the recording format is set to JPEG.) error logs Microsoft® Windows® 8.1 Microsoft® Windows® 8.1 Microsoft® Windows® 7 Windows® Internet Explorer® 10 (32 bit) Windows® Internet Explorer® 9 (32 bit) Safari', Google Chrome*, Mozilla Firefox* * with limitations in the part of setting screen 10Base-T / 100Base-TX, RJ45 connector (female) 2 mega pixel [16 : 9] 1,920 x 1,080 / 1,280 x 720 / 640 x 360 / 320 x 180 / 160 x 9 * "1,920 x 1,080 / 1,280 x 720 / 640 x 360 / 320 x 180 / 160 x 9 * "1,920 x 1,080 / 1,280 x 720 / 640 x 360 / 320 x 180 / 160 x 9 * "1,920 x 1,080 / 1,280 x 720 / 640 x 360 / 320 x 180 / 160 x 9 * "1,920 x 1,080 / 1,280 x 720 / 640 x 360 / 320 x 180 / 160 x 9 * "1,920 x 1,080 / 1,280 x 960 / 800 x 600 / VGA / 400 x 300 / QVGA / 160 x 120 * "1,600 x 1,200 / 1,280 x 960 / 800 x 600 / VGA / 400 x 300 / QVGA / 160 x 120 * "1,600 x 1,200 / 1,280 x 960 / 800 x 600 / VGA / 400 x 300 / QVGA / 160 x 120 * "1,600 x 1,200 / 1,280 x 960 / 800 x 600 / VGA / 400 x 300 /
Browser GUI	Field of View Maximum a Focus Dist Angle Camera Cc Display Mc Camera Tit Clock Disp Clock Disp Clock Disp Clock Disp Cone Shot I SD Memor Data Dowr GUI/Setup Menu Lang System Lo Supported Supported Network IF Image Resolution	WV-SFN110 aperture ratio ance ontrol ode le lay Capture y load g OS *2 *3 Browser WV-SFN130	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a ceiling Horizontal : -20 ° to +20 ° Vertical : -20 ° to +20 ° Vertical : -20 ° to -90° Vertical : -20 ° to -90° Spot, Quad : Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only). 20 characters camera title available. Up to 20 alphanumeric characters Time: 12H/24H/0ft, Date : 5 formats on the browser, Summer time (Manuz A still picture will be displayed on a newly opened window. Still or motion Images recorded in the SDXC/SDHC/SD memory card can be downloaded. English, Italian, French, German, Spanish, Portuguese, Chinese, Russian, Japanese Up to 100 (Internal), Up to 4,000 (SDXC/SDHC/SD memory when the recording format is set to JPEG.) error logs Microsoft® Windows® 10 Microsoft® Windows® 8.1 Microsoft® Windows® 8 Microsoft® Windows® 7 Windows® Internet Explorer® 10 (32 bit) Windows® Internet Explorer® 9 (32 bit) Windows® Internet Explorer® 9 (32 bit) Windows® Internet Explorer® 9 (32 bit) Windows® Internet Explorer® 8 (32 bit) Safari, Google Chrome*, Mozilla Firefox* * "thit limitations in the part of setting screen 10Base-T / 100Base-TX, RJ45 connector (female) • 1,920 x 1,080 / 1,280 x 720 / 640 x 360 / 320 x 180 / 160 x 9 * "1,920 x 1,080 / 1,280 x 960 / 800 x 600 / VGA / 400 x 300 / QVGA / 160 x 120 * "1,600 x 1,200" mode is only available for H.264(1), H.264(2) * "1,600 x 1,200" mode is only available for H.264(1), H.264(2) * "1,600 x 1,200" mode is only available for H.264(1), H.264(2) * "1,600 x 1,200" mode is
Browser GUI	Field of View Maximum a Focus Dist Angle Camera Cc Display Mc Camera Tit Clock Disp Clock Disp Clock Disp Clock Disp Cone Shot I SD Memor Data Dowr GUI/Setup Menu Lang System Lo Supported Supported Network IF Image Resolution	WV-SFN110 ance ance ance ance ance ance ance ance	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a ceiling Horizontal : -20 ° to +20 ° Vertical : -20 ° to +20 ° Vertical : -20 ° to -90° Vertical : -20 ° to 0 ° (right under) to +90 ° (right beside) Installing on a wall Horizontal : +90 ° to -90° Vertical : -20 ° to 0 ° (right beside) to +90 ° (right under) Brightness Spot, Quad : Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only). 20 characters camera title available. Up to 20 alphanumeric characters Time : 12H/24H/0ff, Date : 5 formats on the browser, Summer time (Manua A still picture will be displayed on a newly opened window. Still or motion Images recorded in the SDXC/SDHC/SD memory card can be downloaded. English, Italian, French, German, Spanish, Portuguese, Chinese, Russian, Japanese Up to 100 (Internal), Up to 4,000 (SDXC/SDHC/SD memory when the recording format is set to JPEG,) error logs Microsoft® Windows® 10 Microsoft® Windows® 11 Microsoft® Windows® 8 Microsoft® Windows® 8 Microsoft® Windows® 8 Microsoft® Internet Explorer® 11 (32 bit) Windows® Internet Explorer® 9 (32 bit) Windows® Internet Explorer® 11 (32 bit) Windows® Internet Explorer® 9 (32 bit) Windows® Internet Explorer® 10 (32 bit) Windows® Internet Explorer® 10 (32 bit) </td
Browser GUI	Field of View Maximum a Focus Dist Angle Camera Cc Display Mc Camera Tit Clock Disp Clock Disp Clock Disp Clock Disp Cone Shot I SD Memor Data Dowr GUI/Setup Menu Lang System Lo Supported Supported Network IF Image Resolution	WV-SFN110 aperture ratio ance ontrol ode le lay Capture y load g OS *2 *3 Browser WV-SFN130	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a ceiling Horizontal : -20 ° to 1° (right under) to +90 ° (right beside) Installing on a wall Horizontal : -20 ° to 0 ° (right under) to +90 ° (right beside) Installing on a wall Horizontal : -90 ° to -90° Vertical : -20 ° to 0 ° (right beside) to +90 ° (right under) Brightness Spot, Quad : Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only). 20 characters camera title available. Up to 20 alphanumeric characters Time : 12H/24H/Oft, Date : 5 formats on the browser, Summer time (Manua A still picture will be displayed on a newly opened window. Still or motion Images recorded in the SDXC/SDHC/SD memory card can be downloaded. English, Italian, French, German, Spanish, Portuguese, Chinese, Russian, Japanese Up to 100 (Internal), Up to 4,000 (SDXC/SDHC/SD memory when the recording format is set to JPEG.) error logs Microsoft® Windows® 10 Microsoft® Windows® 7 Windows® Internet Explorer® 10 (32 bit) Windows® Internet Explorer® 10 (32 bit) Windows® Internet Explorer® 8 (20 bit) Safari*, Google Chrome*, Mozilla Firefox* * with limitations in the part of setting screen 10Base-T / 100Base-TX, RJ45 connector (female) • * 2 mega pixel [16 : 9] 1,920 x 1,080 / 1,280 x 720 / 640 x 360 / 320 x 180 / 160 x 9 * "1,300 x 1,200 / 1,280 x 960 / 800 x 600 / VGA / 400 x 300 / QVGA / 160 x 120 * "1,600 x 1,200 / 1,280 x 960 / 800 x 600 / VGA / 400 x 300 / QVGA / 160 x 120 * "1,600 x 1,200 / 1,280 x 960 / 800 x 600 / VGA / 400 x 300 / QVGA / 160 x 120 * "1,600 x 1,260 mode is only available for H.264(1), H.264(2 * 3 mega pixel [4 : 3] 2,048 x 1,536 * / 1,280 x 960 / 800 x 600 / VGA / 400 x 300 / QVGA / 160 x 120 * "2,048 x 1,536 * mode is only available for H.264(1), H.264(2 * 13 mega pixel [16 : 9]
Browser GUI	Field of View Maximum a Focus Dist Angle Camera Cc Display Mc Camera Tit Clock Disp Clock Disp Clock Disp Clock Disp Cone Shot I SD Memor Data Dowr GUI/Setup Menu Lang System Lo Supported Supported Network IF Image Resolution	WV-SFN110 ance ance ance ance ance ance ance ance	[16 : 9 mode] Horizontal : 100 ° Vertical : 55 ° [4 : 3 mode] Horizontal : 100 ° Vertical : 73 ° 1 : 2.3 0.5 m - ∞ Installing on a ceiling Horizontal : -20 ° to +20 ° Vertical : -20 ° to +20 ° Vertical : -20 ° to -90° Vertical : -20 ° to 0 ° (right under) to +90 ° (right beside) Installing on a wall Horizontal : +90 ° to -90° Vertical : -20 ° to 0 ° (right beside) to +90 ° (right under) Brightness Spot, Quad : Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only). 20 characters camera title available. Up to 20 alphanumeric characters Time : 12H/24H/0ff, Date : 5 formats on the browser, Summer time (Manua A still picture will be displayed on a newly opened window. Still or motion Images recorded in the SDXC/SDHC/SD memory card can be downloaded. English, Italian, French, German, Spanish, Portuguese, Chinese, Russian, Japanese Up to 100 (Internal), Up to 4,000 (SDXC/SDHC/SD memory when the recording format is set to JPEG,) error logs Microsoft® Windows® 10 Microsoft® Windows® 11 Microsoft® Windows® 8 Microsoft® Windows® 8 Microsoft® Windows® 8 Microsoft® Internet Explorer® 11 (32 bit) Windows® Internet Explorer® 9 (32 bit) Windows® Internet Explorer® 11 (32 bit) Windows® Internet Explorer® 9 (32 bit) Windows® Internet Explorer® 10 (32 bit) Windows® Internet Explorer® 10 (32 bit) </td

Network	Image compression method					
			Constant bit rate / Variable bit rate / Frame rate /			
		Mode	Best effort / Advanced VBR			
		Frame Rate	1/3/5/7.5/10/12/15/20/30 fps			
		Bit Rate per	64 / 128 / 256 / 384 / 512 / 768 / 1,024 / 1,536 / 2,048 / 3,072 /			
		Client	4,096 / 6,144 / 8,192 / 10,240 / 12,288 / 14,336 / 16,384 /			
			20,480 / 24,576 / 30,720 / 40,960 kbps			
			* The available range of the H.264 bit rate varies depending on			
			the setting selected for "image capture size".			
		Image Quality	<when best="" bit="" constant="" effort="" is="" or="" rate="" selected=""></when>			
			Low / Normal / Fine			
			<when bit="" is="" rate="" selected="" variable=""></when>			
			0 Super fine /1 Fine /2 / 3 / 4 / 5 Normal / 6 / 7 / 8 / 9 Low			
		Smart Coding mode	On (Low / Mid / High) / Off (Only when "Variable bit rate" is selected.)			
			Unicast / Multicast			
	JPEG	Image Quality				
			0.1 fps - 30 fps			
		Transmission Type				
	Cropping function *6		Off / JPEG (1) / JPEG (2) / JPEG (3) / H.264 (1) / H.264 (2) /			
			H.264 (3) / H.264 (4) / H.264 (all)			
			Alarm action On/ Off			
	Audio compression method		G.726 (ADPCM) 32 kbps / 16 kbps, G.711 64 kbps, AAC-LC ⁺⁷ 64 kbps,			
			AAC-LC (HIGH QUALITY)*8 64 kbps / 96 kbps / 128 kbps			
	Bandwidth control		64 / 128 / 256 / 384 / 512 / 768 / 1,024 / 2,048 / 4,096 / 8,192 kbps			
	Supported Protocol		IPv6 : TCP/IP, UDP/IP, HTTP, HTTPS, RTP, FTP, SMTP, DNS,			
		111010001	NTP, SNMP, DHCPv6, MLD, ICMP, ARP, DiffServ			
			IPv4 : TCP/IP, UDP/IP, HTTP, HTTPS, RTSP, RTP, RTP/RTCP,			
			FTP, SMTP, DHCP, DNS, DDNS, NTP, SNMP, UPnP,			
			IGMP, ICMP, ARP, DiffServ			
	FTP Client		Alarm image transmission, FTP periodic transmission			
			(When the FTP transmission is failed, backup on an optional			
			SDXC/SDHC/SD memory card is available.)			
	Maximum concurrent		Up to 14 users (Depends on network conditions)			
	access number					
	SDXC/SDHC/SD Memory Card(Option)		Manufactured by Panasonic (SD speed class 4 or higher)			
			SDXC memory card : 64 GB, 128 GB			
			SDHC memory card : 4 GB, 8 GB, 16 GB, 32 GB			
			SD memory card : 2 GB			
			(except miniSD card and microSD card)			
	Cellular Phone Compatibility		JPEG image			
			iPad, iPhone, iPod touch(iOS 4.2.1 or later),			
			Android TM mobile terminals			
Alarm	Alarm Source		VMD, Command alarm, Audio detection alarm			
	Alarm Actions		SDXC/SDHC/SD memory recording, E-mail notification,			
			Indication on browser, FTP image transfer, Panasonic protocol output			
	Alarm Log		With SDXC/SDHC/SD memory card : 5,000 logs			
	Schedule		VMD			
General	Safety/EMC Standard		<safety></safety>			
			UL (UL60950-1), C-UL (CAN/CSA C22.2 No.60950-1), CE, IEC60950-1			
			<emc></emc>			
			FCC Part15 ClassA, ICES003 ClassA, EN55022 ClassB, EN55024			
	Power Source and		PoE (IEEE802.3af compliant)			
	Power Consumption		48 V DC : 90 mA / Approx. 4.3 W (Class 2 device)			
	Ambient		0 °C to +40 °C {32 °F to 104 °F}			
	Operating Temperature					
	Ambient Operating Humidity		10 % to 90 % (no condensation)			
	Built-in microphone		Nondirectional electret condenser microphone			
	Dimensions		ø104 mm × 47 mm (H) {ø4-3/32 inches x 1-27/32 inches (H)}			
			Dome radius 54 mm {2-1/8 inches}			
	Mass (approx.)		Approx. 260 g {0.57 lbs}			
	Finish		Main body : ABS resin, sail white			
	1 111311					

*1 Converted value

*2 Refer to "Notes on Windows® 7 / Windows® 8 / Windows® 8.1 / Windows® 10" on

the provided CD-ROM for further information about system requirements for a PC and precautions when using Microsoft® Windows® 10 or Microsoft® Windows® 8.1 or Microsoft® Windows® 8 or Microsoft® Windows® 7.

*3 When using IPv6 for communication, use Microsoft® Windows® 10 or Microsoft® Windows® 8.1 or Microsoft® Windows® 8 or Microsoft® Windows® 7.

*4 Used by super resolution techniques

*5 Transmission for 4 streams can be individually set.

*6 Cropping setting is not possible for stream set to maximum resolution.
*7 Only use AAC-LC (Advanced Audio Coding - Low Complexity) when recording audio on an SD memory card.
*8 When "AAC-LC (HIGH QUALITY)" is selected, there are limitations about the following function.


· "SD memory card" is not available.

· "Audio detection" is not available.

· HTTPS is not available.

 \cdot The maximum concurrent access number is limited to 5

Part Names and Functions

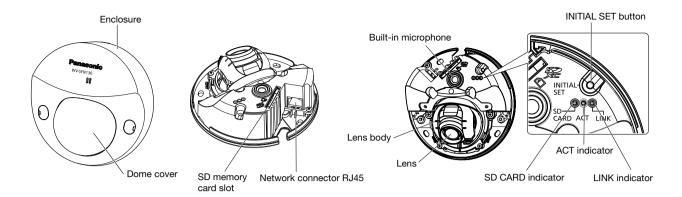


* These illustrations are WV-SFN130.


Appearance

Unit : mm (inches)









- Trademarks and registered trademarks Microsoft, and Windows are registered trademarks of Microsoft Corporation in the U.S. and other countries.
- iPad, iPhone and iPod touch are registered trademarks of Apple Inc.
- Android is a trademark of Google Inc.
 "i-PRO SmartHD", and "Super Dynamic" logos are trademarks or registered trademarks of Panasonic Corporation.
- ONVIF and the ONVIF logo are trademarks of ONVIF Inc. - All other trademarks identified herein are the property of their respective owners.

Important

- Safety Precaution: Carefully read the Important Information, Installation Guide and operating instructions before using this product. - Panasonic cannot be responsible for the performance of the network and/or other manufacturers' products used on the network.

DISTRIBUTED BY :

 Masses and dimensions are approximate. · Specifications are subject to change without notice.



http://security.panasonic.com f http://www.facebook.com/PanasonicNetworkCamera (2A-169DL)